



243 Jubug-ri, Yangji-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do 449-822, Korea
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

EMC TEST REPORT

Dates of Tests: November 02 – 06, 2018
 Test Report S/N: LR500121811F
 Test Site : LTA Co., Ltd.

Model No.

DC-Y6513RX

APPLICANT

IDIS CO., LTD.

Equipment Name : Network Camera
 Manufacturer : IDIS CO., LTD.
 Model name : DC-Y6513RX
 Additional Model name : NC-Y6513RX
 Test Device Serial No.: Identification
 Directive : Electromagnetic Compatibility Directive 2014/30/EU
 Rule Part(s) : EN 55032:2015
 EN 50130-4:2011/A1:2014
 EN 61000-3-2:2014
 EN 61000-3-3:2013
 Data of reissue : November 08, 2018

This test report is issued under the authority of:

The test was supervised by:

Young Kyu Shin, Technical Manager

Min Young Choi, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

NVLAP[®]

NVLAP LAB CODE 200723-0

| Revision | Date of issue | Test report No. | Description |
|----------|---------------|-----------------|-------------|
| 0 | 08.11.2018 | LR500121811F | Initial |

TABLE OF CONTENTS

| | |
|-----------------------------------------------------------------------|----|
| 1. General information's | 4 |
| 2. Information's about test item | 5 |
| 3. Test Report | 7 |
| 3.1 Summary of tests | 7 |
| 3.2 EMISSION | 8 |
| 3.2.1 Conducted emissions | 8 |
| 3.2.2 Radiated Emission | 14 |
| 3.2.3 Harmonic Current (AC power input port) | 22 |
| 3.2.4 Voltage Variation and Flicking (AC power input port)..... | 24 |
| 3.3 IMMUNITY | 27 |
| 3.3.1 Electrostatic Discharge | 27 |
| 3.3.2 RF Electromagnetic Field | 29 |
| 3.3.3 Electrical fast transients | 31 |
| 3.3.4 Surge | 32 |
| 3.3.5 Conducted disturbances, induced by radio-frequency fields | 34 |
| 3.3.6 Mains supply voltage dips, short interruptions | 35 |
| 3.3.7 Mains supply voltage variations | 36 |
| APPENDIX A TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS..... | 37 |
| APPENDIX B PERFORMANCE CRITERIA | 41 |
| APPENDIX C PHOTOGRAPHS | 44 |

1. General information's

1-1 Test Performed

Company name : **LTA Co., Ltd.**
 Address : 243, Jubug-ri, Yangji-Myeon, Yongin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

| Agency | Country | Accreditation No. | Validity | Reference |
|--------|---------|-------------------|------------|-----------------------|
| NVLAP | U.S.A | 200723-0 | 2019-09-30 | ECT accredited Lab. |
| RRA | KOREA | KR0049 | - | EMC accredited Lab. |
| FCC | U.S.A | 649054 | 2019-04-13 | FCC CAB |
| VCCI | JAPAN | C-4948, | 2020-09-10 | VCCI registration |
| | | T-2416, | 2020-09-10 | |
| | | R-4483(10 m), | 2020-10-15 | |
| | | G-847 | 2018-12-13 | |
| IC | CANADA | 5799A-2 | 2019-03-15 | IC filing |
| KOLAS | KOREA | NO.551 | 2021-08-20 | KOLAS accredited Lab. |

2. Information's about test item

2-1 Client/ Manufacturer

Company name : IDIS CO., LTD.
 Address : 8-10, TECHNO 3-RO, YUSEONG-GU, DAEJEON, KOREA
 Telephone / Facsimile : +82-31-723-5205 / +82-31-723-5108

Factory 1

Company name : IDIS CO., LTD.
 Address : 8-10, TECHNO 3-RO, YUSEONG-GU, DAEJEON, KOREA

2-2 Equipment Under Test (EUT)

Class : A
 Equipment Name : Network Camera
 Model name : DC-Y6513RX
 Additional Model name : NC-Y6513RX
 DC-Y6513RX is basic model, which was tested.
 Additional Model is identical to DC-Y6513RX except for Model Name, marketing purpose.
 Serial number : Identification
 Date of receipt : October 24, 2018
 EUT condition : Pre-production, not damaged
 Interface ports : DC IN, DATA OUT, LAN, Audio OUT, Audio IN, Alarm IN
 Power rating : AC 230 V, 50 Hz (Adapter) / DC 12 V, 0.62 A, 7.5 W (PoE)
 Modulator : -
 Crystal/Oscillator(s) : -
 Firmware version : XXXX

2-3 Modification

-NONE

2-4 Model Specification

-NONE

2-5 Test conditions

Temp. / Humid. / Pressure : +(20 - 23) °C / (37 - 51) % R.H. / (100 - 101) kPa
 Tested Model : DC-Y6513RX
 Test mode : Capture mode (Adapter), Capture mode (PoE)
 Power supply : AC 230 V, 50 Hz (Adapter) / DC 12 V, 0.62 A, 7.5 W (PoE)

2-6 EUT

| Equipment | Model No. | Serial No. | Manufacturer |
|----------------|------------|------------|----------------|
| Network Camera | DC-Y6513RX | N/A | IDIS CO., LTD. |

2-7 Accessary / Capture mode (Adapter)

| Equipment | Model No. | Serial No. | Manufacturer |
|------------------|----------------|------------------|----------------------------------------|
| Notebook | TFG13 | N/A | N/A |
| Adapter #1 | SW60-12005000W | N/A | SHENZHEN TOP-ASIA ELECTRONICS CO., LTD |
| Speaker | N/A | N/A | N/A |
| Smart Phone | SM-G5510 | N/A | Samsung |
| Alarm | N/A | N/A | N/A |
| Notebook Adapter | A13-040N3A | F186921708004182 | Chicony |

/ Capture mode (PoE)

| Equipment | Model No. | Serial No. | Manufacturer |
|------------------|------------|------------------|--------------|
| Notebook | TFG13 | N/A | N/A |
| PoE | POE 305 | N/A | N/A |
| Speaker | N/A | N/A | N/A |
| Smart Phone | SM-G5510 | N/A | Samsung |
| Alarm | N/A | N/A | N/A |
| Notebook Adapter | A13-040N3A | F186921708004182 | Chicony |

2-8 Cable List / Capture mode (Adapter)

| From | | To | | Length (m) | Shielding | |
|----------|-----------|------------------|----------|---------------|-----------|-----------|
| Type | I/O Port | Type | I/O Port | | Cable | backshell |
| EUT | DC IN | Adapter | DC OUT | 1.5 | NO | Plastic |
| | LAN | Notebook | LAN | 3.0 | YES | Plastic |
| | Audio OUT | Speaker | +, - | 1.0 | NO | Plastic |
| | Audio IN | Smart Phone | AUX | 1.0 | NO | Plastic |
| | Alarm IN | Alarm | - | 2.0 | NO | Plastic |
| Notebook | DC IN | Notebook Adapter | DC OUT | 1.5 | NO | Plastic |

/ Capture mode (PoE)

| From | | To | | Length (m) | Shielding | |
|--------------|-----------|------------------|---------------|---------------|-----------|-----------|
| Type | I/O Port | Type | I/O Port | | Cable | backshell |
| EUT | Data OUT | PoE Injector | LAN | 3.0 | YES | Plastic |
| | Audio OUT | Speaker | +, - | 1.0 | NO | Plastic |
| | Audio IN | Smart Phone | AUX | 1.0 | NO | Plastic |
| | Alarm IN | Alarm | - | 2.0 | NO | Plastic |
| Notebook | DC IN | Notebook Adapter | DC OUT | 1.5 | NO | Plastic |
| | Data IN | PoE Injector | LAN | 3.0 | YES | Plastic |
| PoE Injector | AC IN | AC Power Source | 3 Pin AC Line | 1.5 | NO | Plastic |

3. Test Report

3.1 Summary of tests

| Parameter | Applied Standard | Status |
|-----------------------------------------|-----------------------------------|----------------------|
| I. Emission | | |
| Radiated Emission | EN 55032:2015 | C |
| Conducted Emission | EN 55032:2015 | C |
| Harmonic Current Emission | EN 61000-3-2:2014 | NA ^{Note 3} |
| Voltage Fluctuations and Flicker | EN 61000-3-3:2013 | C |
| II. Immunity | | |
| Electrostatic Discharge | EN 61000-4-2:2009 | C |
| RF Electromagnetic field | EN 61000-4-3:2006/A1:2008/A2:2010 | C |
| Fast Transients Common mode | EN 61000-4-4:2012 | C |
| Surges, line to line and line to ground | EN 61000-4-5:2014/A1:2017 | C |
| RF common mode | EN 61000-4-6:2014/AC:2015 | C |
| Voltage dips and Interruptions | EN 61000-4-11:2004/A1:2017 | C |
| Main supply voltage variations | EN 50130-4:2011/A1:2014 | C |

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 3: We did not test EN61000-3-2 (Harmonic current emissions) for the DC-Y6513RX because equipment whose rated power is less or equal 75W don't need to be tested.

3.2 EMISSION

3.2.1 Conducted emissions

Definition:

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power In/Output ports.

We were performed the test according to LTA procedure LTA-QI-04.

| | |
|-----------------------------|----------------------------------------------|
| Measurement Frequency range | : 150 kHz – 30 MHz |
| Test method | : EN 55032:2015 |
| Measurement RBW | : 9 kHz |
| Test mode | : Capture mode (Adapter), Capture mode (PoE) |
| Result | : Complies |

Measurement Data:

- Refer to the Next page (Maximum emission configuration)

A sample calculation:

COR. F (correction factor)= LISN Insertion loss + Cable loss + Pulse Limiter Factors

Emission Level= meter reading + COR.F

Limits for conducted disturbance at the mains ports of class A ITE

| Frequency Range | Quasi-peak | Average |
|------------------|------------|---------|
| (0.15 – 0.5) MHz | 79 dBuV | 66 dBuV |
| (0.5 – 30) MHz | 73 dBuV | 60 dBuV |

Note: The limits will decrease with the frequency logarithmically within 0.15MHz to 0.5MHz

Limits for conducted disturbance at the mains ports of class B ITE

| Frequency Range | Quasi-peak | Average |
|------------------|----------------|----------------|
| (0.15 – 0.5) MHz | (66 – 56) dBuV | (56 - 46) dBuV |
| (0.5 – 5) MHz | 56 dBuV | 46 dBuV |
| (5 – 30) MHz | 60 dBuV | 50 dBuV |

Note: The limits will decrease with the frequency logarithmically within 0.15 MHz to 0.5 MHz

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class A equipment

| Frequency Range | Voltage limits | | Current limits | |
|------------------|----------------|----------------|----------------|----------------|
| | Quasi-peak | Average | Quasi-peak | Average |
| (0.15 – 0.5) MHz | (97 – 87) dBuV | (84 – 74) dBuV | (53 – 43) dBuV | (40 – 30) dBuV |
| (0.5 – 30) MHz | 87 dBuV | 74 dBuV | 43 dBuV | 30 dBuV |

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class B equipment

| Frequency Range | Voltage limits | | Current limits | |
|------------------|----------------|----------------|----------------|----------------|
| | Quasi-peak | Average | Quasi-peak | Average |
| (0.15 – 0.5) MHz | (84 – 74) dBuV | (74 – 64) dBuV | (40 – 30) dBuV | (30 – 20) dBuV |
| (0.5 – 30) MHz | 74 dBuV | 64 dBuV | 30 dBuV | 20 dBuV |

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Conducted emissions (LINE) / Capture mode (Adapter)




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

| | |
|------------------------------|--------------------------|
| EUT / Model No. : DC-Y6513RX | Phase : LINE |
| Test Mode : Capture mode | Test Power : 230 / 50 |
| Temp. / Humi. : 23 / 47 | Test Engineer : CHOI M Y |

Data: 90

File: D:\Conducted Data\2018\LTA_Conduction_2018_11.EM6 (190)

Date: 2018-11-06

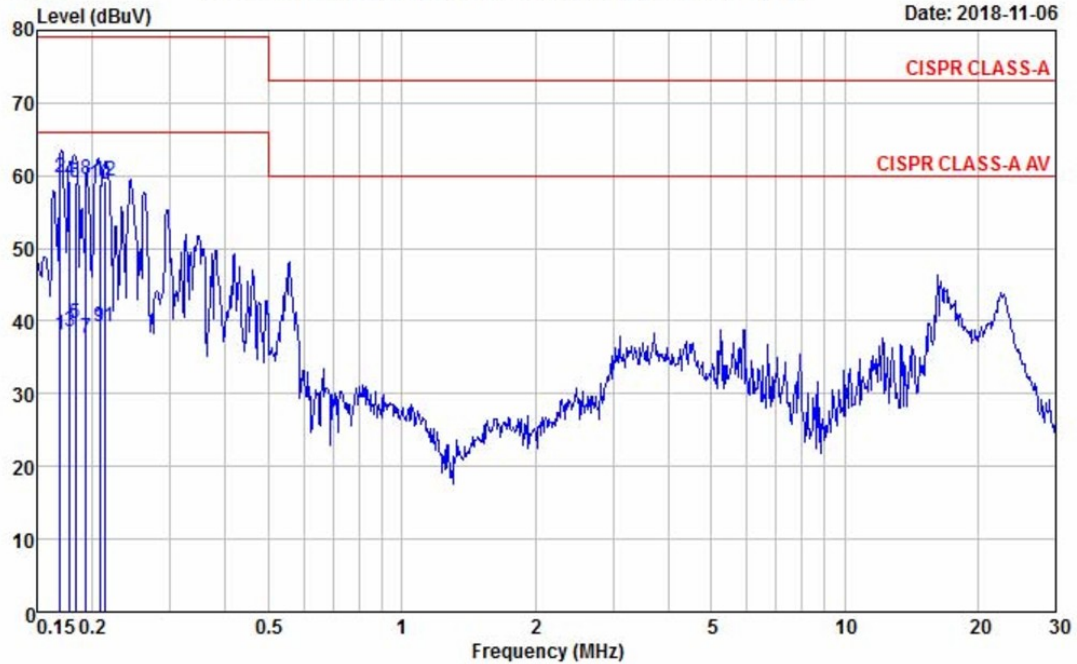

| Freq | RD | RD | C.F | Result | Result | Limit | Limit | Margin | Margin |
|-------|-------|-------|-------|--------|--------|-------|-------|--------|--------|
| MHz | QP | AV | | QP | AV | QP | AV | QP | AV |
| | dBuV | dBuV | | dBuV | dBuV | dBuV | dBuV | dB | dB |
| 0.169 | 40.16 | 18.68 | 19.50 | 59.66 | 38.18 | 79.00 | 66.00 | 19.34 | 27.82 |
| 0.178 | 39.70 | 19.10 | 19.48 | 59.18 | 38.58 | 79.00 | 66.00 | 19.82 | 27.42 |
| 0.183 | 39.48 | 20.24 | 19.48 | 58.96 | 39.72 | 79.00 | 66.00 | 20.04 | 26.28 |
| 0.194 | 39.92 | 18.11 | 19.48 | 59.40 | 37.59 | 79.00 | 66.00 | 19.60 | 28.41 |
| 0.208 | 39.40 | 19.69 | 19.48 | 58.88 | 39.17 | 79.00 | 66.00 | 20.12 | 26.83 |
| 0.213 | 39.86 | 19.75 | 19.48 | 59.34 | 39.23 | 79.00 | 66.00 | 19.66 | 26.77 |

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (NEUTRAL) / Capture mode (Adapter)




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

| | |
|------------------------------|--------------------------|
| EUT / Model No. : DC-Y6513RX | Phase : NEUTRAL |
| Test Mode : Capture mode | Test Power : 230 / 50 |
| Temp. / Humi. : 23 / 47 | Test Engineer : CHOI M Y |

Data: 93

File: D:\Conducted Data\2018\LTA_Conduction_2018_11.EM6 (190)

Date: 2018-11-06

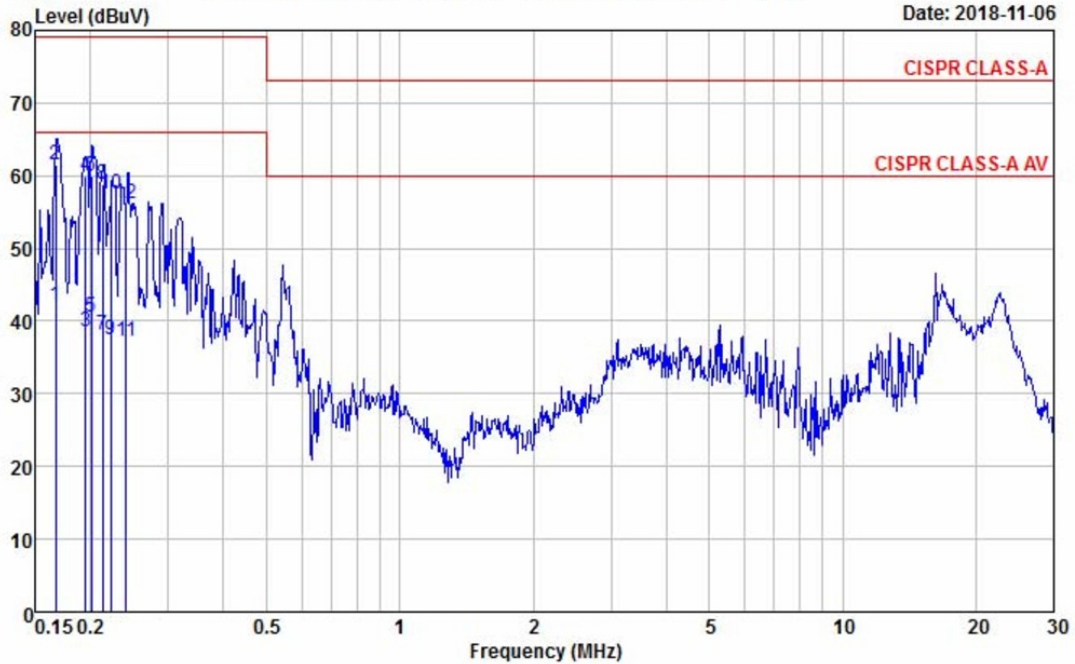

| Freq | RD | RD | C.F | Result | Result | Limit | Limit | Margin | Margin |
|-------|-------|-------|-------|--------|--------|-------|-------|--------|--------|
| MHz | QP | AV | | QP | AV | QP | AV | QP | AV |
| | dBuV | dBuV | dB | dBuV | dBuV | dBuV | dBuV | dB | dB |
| 0.167 | 42.01 | 22.51 | 19.51 | 61.52 | 42.02 | 79.00 | 66.00 | 17.48 | 23.98 |
| 0.195 | 40.56 | 18.96 | 19.49 | 60.05 | 38.45 | 79.00 | 66.00 | 18.95 | 27.55 |
| 0.201 | 40.42 | 21.02 | 19.49 | 59.91 | 40.51 | 79.00 | 66.00 | 19.09 | 25.49 |
| 0.213 | 39.40 | 18.64 | 19.49 | 58.89 | 38.13 | 79.00 | 66.00 | 20.11 | 27.87 |
| 0.222 | 38.04 | 17.93 | 19.49 | 57.53 | 37.42 | 79.00 | 66.00 | 21.47 | 28.58 |
| 0.241 | 36.66 | 17.75 | 19.49 | 56.15 | 37.24 | 79.00 | 66.00 | 22.85 | 28.76 |

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (TEL_100 M) / Capture mode (Adapter)




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

| | |
|------------------------------|--------------------------|
| EUT / Model No. : DC-Y6513RX | Phase : TEL_100M |
| Test Mode : Capture mode | Test Power : 230 / 50 |
| Temp. / Humi. : 23 / 47 | Test Engineer : CHOI M Y |

Data: 87

File: D:\Conducted Data\2018\LTA_Conduction_2018_11.EM6 (87)

Date: 2018-11-06

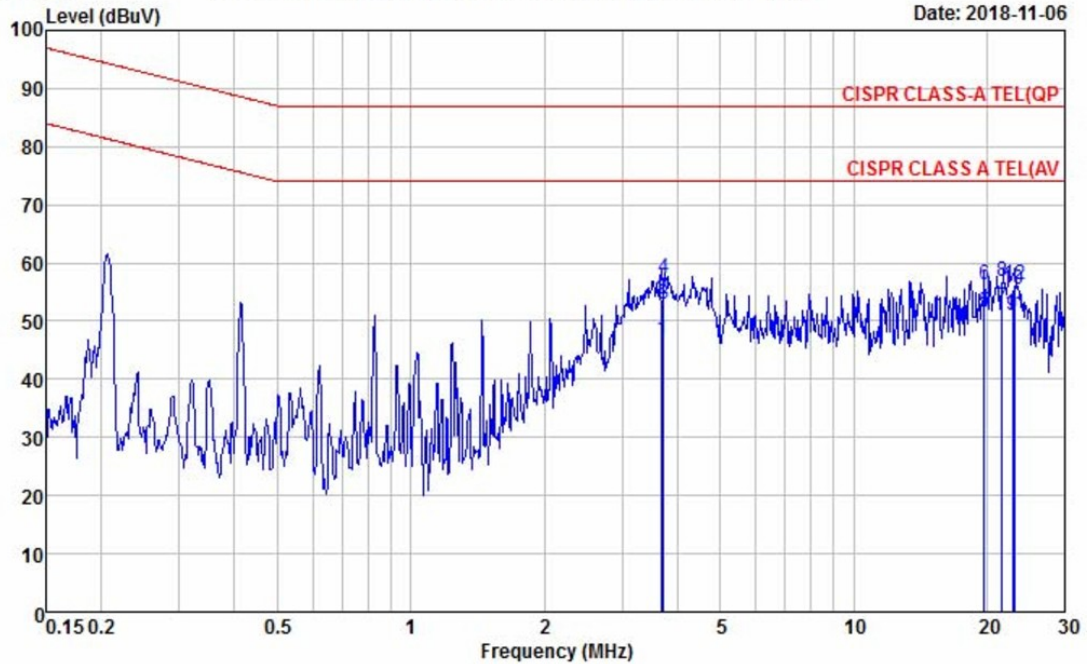

| Freq | RD | RD | C.F | Result | Result | Limit | Limit | Margin | Margin |
|--------|-------|-------|-------|--------|--------|-------|-------|--------|--------|
| MHz | QP | AV | | QP | AV | QP | AV | QP | AV |
| | dBuV | dBuV | dB | dBuV | dBuV | dBuV | dBuV | dB | dB |
| 3.688 | 34.33 | 27.56 | 19.37 | 53.70 | 46.93 | 87.00 | 74.00 | 33.30 | 27.07 |
| 3.724 | 37.96 | 33.54 | 19.37 | 57.33 | 52.91 | 87.00 | 74.00 | 29.67 | 21.09 |
| 19.709 | 36.51 | 31.72 | 19.76 | 56.27 | 51.48 | 87.00 | 74.00 | 30.73 | 22.52 |
| 21.663 | 37.00 | 32.55 | 19.91 | 56.91 | 52.46 | 87.00 | 74.00 | 30.09 | 21.54 |
| 22.882 | 35.56 | 31.04 | 19.99 | 55.55 | 51.03 | 87.00 | 74.00 | 31.45 | 22.97 |
| 23.130 | 36.20 | 31.38 | 20.01 | 56.21 | 51.39 | 87.00 | 74.00 | 30.79 | 22.61 |

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (TEL_1000 M) / Capture mode (PoE)




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

| | |
|-------------------------------|--------------------------|
| EUT / Model No. : DC-Y6513RX | Phase : TEL_100M |
| Test Mode : Capture mode(POE) | Test Power : 230 / 50 |
| Temp. / Humi. : 23 / 47 | Test Engineer : CHOI M Y |

Data: 84

File: D:\Conducted Data\2018\LTA_Conduction_2018_11.EM6 (313)

Date: 2018-11-06

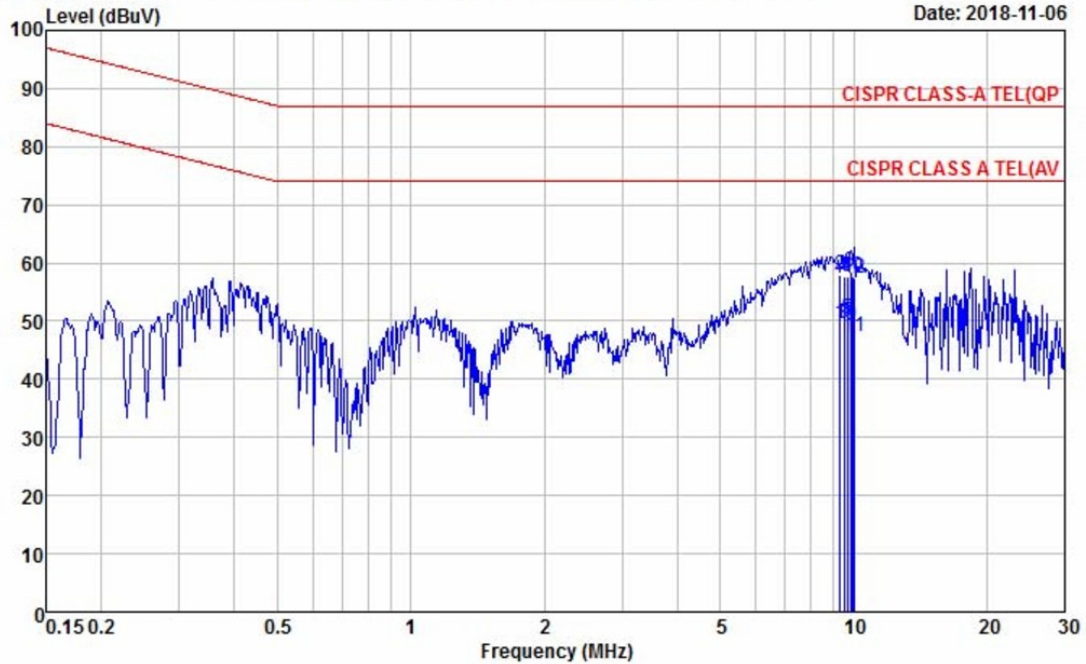

| Freq | RD | RD | C.F | Result | Result | Limit | Limit | Margin | Margin |
|--------|-------|-------|-------|--------|--------|-------|-------|--------|--------|
| MHz | QP | AV | | QP | AV | QP | AV | QP | AV |
| | dBuV | dBuV | dB | dBuV | dBuV | dBuV | dBuV | dB | dB |
| 9.320 | 38.29 | 29.95 | 19.59 | 57.88 | 49.54 | 87.00 | 74.00 | 29.12 | 24.46 |
| 9.528 | 38.16 | 30.07 | 19.59 | 57.75 | 49.66 | 87.00 | 74.00 | 29.25 | 24.34 |
| 9.668 | 38.02 | 30.80 | 19.60 | 57.62 | 50.40 | 87.00 | 74.00 | 29.38 | 23.60 |
| 9.846 | 38.79 | 30.25 | 19.61 | 58.40 | 49.86 | 87.00 | 74.00 | 28.60 | 24.14 |
| 9.939 | 38.11 | 29.62 | 19.61 | 57.72 | 49.23 | 87.00 | 74.00 | 29.28 | 24.77 |
| 10.045 | 37.67 | 27.69 | 19.62 | 57.29 | 47.31 | 87.00 | 74.00 | 29.71 | 26.69 |

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

3.2.2 Radiated Emission

Definition:

The test assesses the ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

We were performed the test according to LTA procedure LTA-QI-04.

| | |
|-----------------------------|----------------------------------------------|
| Test method | : EN 55032:2015 |
| Measuring Distance | : 10 m for below 1 GHz / 3 m for above 1 GHz |
| Measurement Frequency range | : 30 MHz – 6 000 MHz |
| Measurement RBW | : 120 kHz @ 10 m / 1 MHz @ 3 m |
| Test mode | : Capture mode (Adapter), Capture mode (PoE) |
| Result | : Complies |

Measurement Data:

- Refer to the Next page (Maximum emission configuration)

- The highest internal source of an EUT is higher than 108 MHz, the measurement shall be made up to 6 GHz.

(The highest internal source of an EUT : higher than 108 MHz)

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

Limit of 10 m for below 1 GHz

CLASS A

| Frequency Range | Quasi-peak |
|-------------------|------------|
| (30 – 230) MHz | 40 dBuV/m |
| (230 – 1 000) MHz | 47 dBuV/m |

CLASS B

| Frequency Range | Quasi-peak |
|-------------------|------------|
| (30 – 230) MHz | 30 dBuV/m |
| (230 – 1 000) MHz | 37 dBuV/m |

Limit of 3m for above 1 GHz

CLASS A

| Frequency Range | Average Limit @ 3m (dB μ V/m) | Peak limit @ 3m (dB μ V/m) |
|---------------------|------------------------------------------------------|-----------------------------------|
| (1 000 – 3 000) MHz | 56 | 76 |
| (3 000 – 6 000) MHz | 60 | 80 |
| NOTE: | The lower limit applies at the transition frequency. | |

CLASS B

| Frequency Range | Average Limit @ 3m (dB μ V/m) | Peak limit @ 3m (dB μ V/m) |
|---------------------|------------------------------------------------------|-----------------------------------|
| (1 000 – 3 000) MHz | 50 | 70 |
| (3 000 – 6 000) MHz | 54 | 74 |
| NOTE: | The lower limit applies at the transition frequency. | |

Radiated Emission (Below 1 GHz) / V _ Capture mode (Adapter)



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: DC-Y6513RX

Temp/Humi: 21 / 37


Test Mode : Capture mode

Tested by: CHOI M Y

Data: 127

File: C:\Program Files (x86)\e3\1811-1.EM6 (281)

Date: 2018-11-02

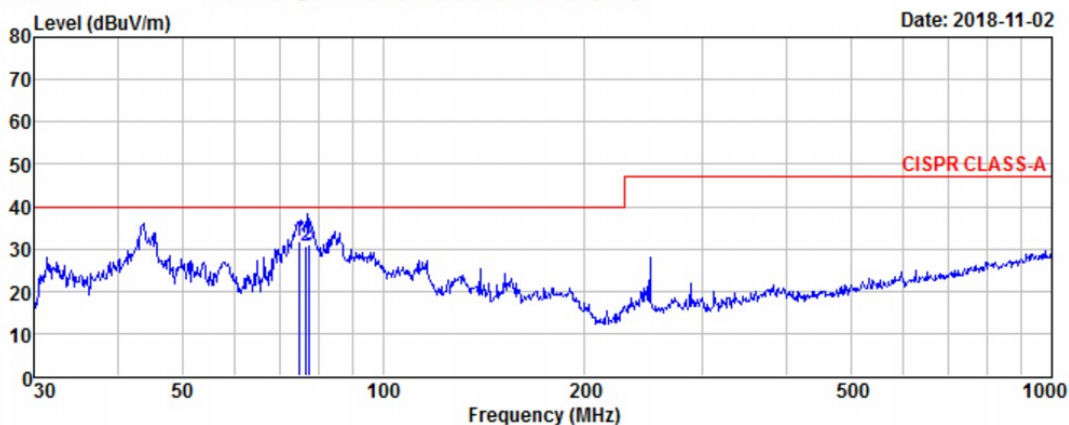

| Freq | Reading | C.F | Result | Limit | Margin | Height | Angle | Polarity |
|-------|---------|--------|--------------|--------|--------|--------|-------|----------|
| MHz | dBuV | dB | QP dBuV/m | dBuV/m | dB | cm | deg | |
| 74.68 | 52.36 | -20.54 | 31.82 | 40.00 | 8.18 | 219 | 101 | VERTICAL |
| 76.55 | 51.55 | -20.99 | 30.56 | 40.00 | 9.44 | 279 | 46 | VERTICAL |
| 77.49 | 52.25 | -21.22 | 31.03 | 40.00 | 8.97 | 236 | 131 | VERTICAL |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / H _ Capture mode (Adapter)



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: DC-Y6513RX

Temp/Humi: 21 / 37


Test Mode : Capture mode

Tested by: CHOI M Y

Data: 128

File: C:\Program Files (x86)\e3\1811-1.EM6 (281)

Date: 2018-11-02

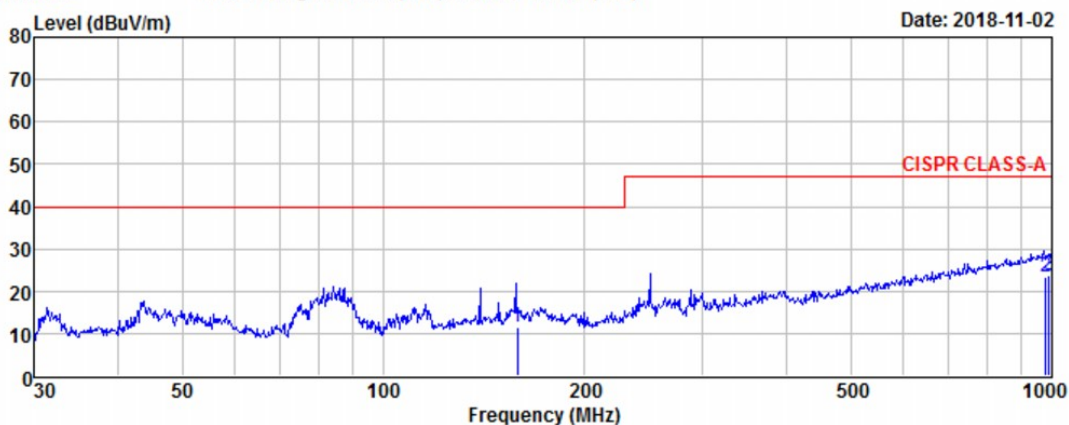

| Freq | Reading | C.F | Result | Limit | Margin | Height | Angle | Polarity |
|--------|---------|--------|--------------|--------|--------|--------|-------|------------|
| MHz | dBuV | dB | QP dBuV/m | dBuV/m | dB | cm | deg | |
| 158.43 | 27.25 | -15.63 | 11.62 | 40.00 | 28.38 | 387 | 141 | HORIZONTAL |
| 978.09 | 24.25 | -0.71 | 23.54 | 47.00 | 23.46 | 219 | 94 | HORIZONTAL |
| 990.70 | 24.20 | -0.60 | 23.60 | 47.00 | 23.40 | 171 | 343 | HORIZONTAL |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / V _ Capture mode (PoE)



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: DC-Y6513RX

Temp/Humi: 21 / 37


Test Mode : Capture mode(POE)

Tested by: CHOI M Y

Data: 147

File: C:\Program Files (x86)\e3\1811-1.EM6 (281)

Date: 2018-11-02

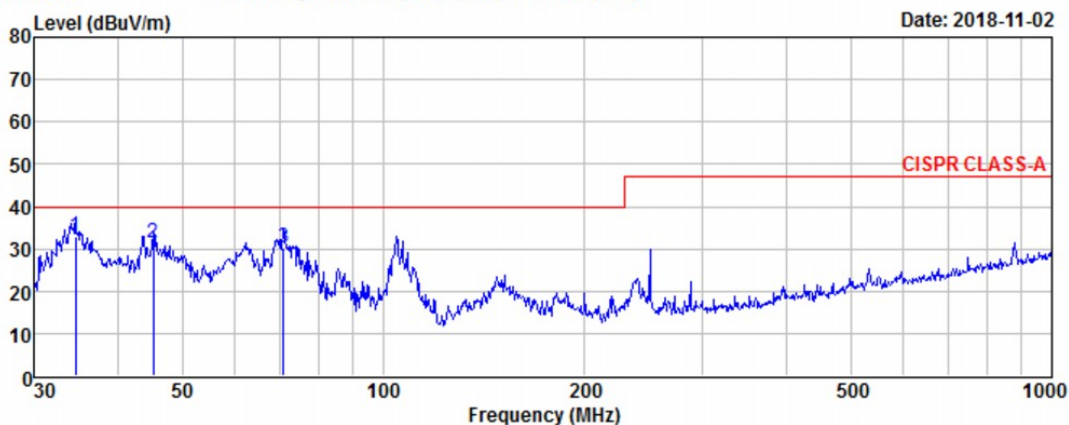

| Freq | Reading | C.F | Result | Limit | Margin | Height | Angle | Polarity |
|-------|---------|--------|--------------|--------|--------|--------|-------|----------|
| MHz | dBuV | dB | QP dBuV/m | dBuV/m | dB | cm | deg | |
| 34.63 | 51.53 | -18.69 | 32.84 | 40.00 | 7.16 | 102 | 248 | VERTICAL |
| 45.25 | 49.12 | -17.70 | 31.42 | 40.00 | 8.58 | 100 | 120 | VERTICAL |
| 70.81 | 49.93 | -19.66 | 30.27 | 40.00 | 9.73 | 106 | 144 | VERTICAL |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / H _ Capture mode (PoE)



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: DC-Y6513RX

Temp/Humi: 21 / 37


Test Mode : Capture mode(POE)

Tested by: CHOI M Y

Data: 149

File: C:\Program Files (x86)\e3\1811-1.EM6 (281)

Date: 2018-11-02

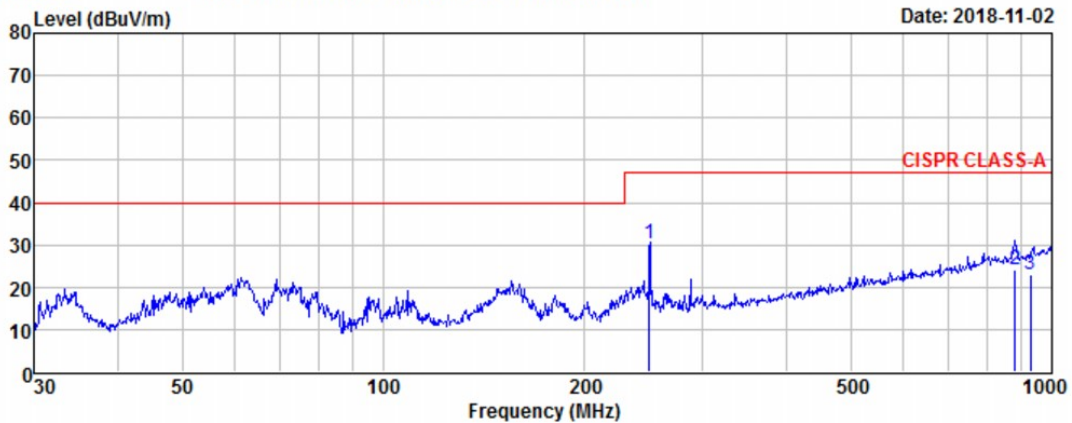

| Freq | Reading | C.F | Result | Limit | Margin | Height | Angle | Polarity |
|--------|---------|--------|--------------|--------|--------|--------|-------|------------|
| MHz | dBuV | dB | QP dBuV/m | dBuV/m | dB | cm | deg | |
| 250.00 | 46.56 | -16.36 | 30.20 | 47.00 | 16.80 | 372 | 128 | HORIZONTAL |
| 879.80 | 26.75 | -2.77 | 23.98 | 47.00 | 23.02 | 251 | 149 | HORIZONTAL |
| 929.97 | 24.43 | -1.47 | 22.96 | 47.00 | 24.04 | 151 | 133 | HORIZONTAL |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Above 1 GHz) _ Capture mode (Adapter)

EUT/Model No.: DC-Y6513RX

Temp/Humi: 20 / 42


Test Mode : Capture mode

Tested by: CHOI M Y

Data: 281

File: C:\Program Files (x86)\e3\1811-1.EM6 (296)

Date: 2018-11-02

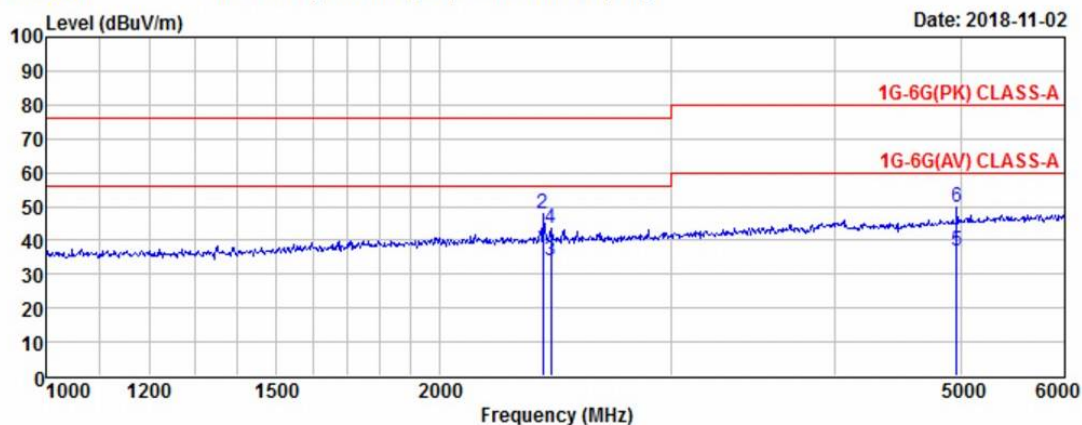

EUT/Model No.: DC-Y6513RX

Temp/Humi: 20 / 42


Test Mode : Capture mode

Tested by: CHOI M Y

Data: 280

File: C:\Program Files (x86)\e3\1811-1.EM6 (296)

Date: 2018-11-02

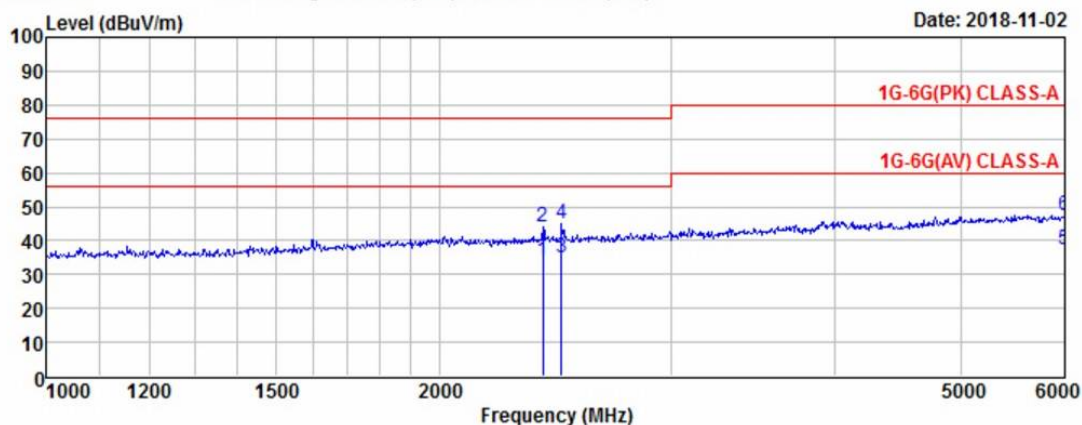

Manufacture : IDIS CO., LTD.

Test Date

Temp.: Humidity Distance

[°C]

: [%]

(m)

Model : DC-Y6513RX

2018-11-02

20

42

3.8

TEST mode : Capture mode

Ver Data: 281

Hor Data: 280

| Freq.(MHz) | Reading(PK) | Reading(AV) | C.F | Result(PK) | Result(AV) | Limit(PK) | Limit(AV) | Margin(PK) | Margin(AV) | Height | Angle | Polarity |
|------------|-------------|-------------|-------|------------|------------|-----------|-----------|------------|------------|--------|-------|----------|
| MHz | dBuV | dBuV | dB | dBuV/m | dBuV/m | dBuV/m | dBuV/m | dB | dB | cm | deg | Hor/Ver |
| 2397.0 | 45.4 | 35.4 | 0.84 | 46.26 | 36.25 | 76.0 | 56.0 | 29.74 | 19.75 | 100 | 94 | H |
| 2475.0 | 45.6 | 35.6 | 1.44 | 47.04 | 37.07 | 76.0 | 56.0 | 28.96 | 18.93 | 100 | 225 | H |
| 6000.0 | 34.5 | 24.4 | 15.03 | 49.53 | 39.41 | 80.0 | 60.0 | 30.47 | 20.59 | 100 | 220 | H |
| 2397.0 | 48.2 | 38.2 | 1.50 | 49.70 | 39.69 | 76.0 | 56.0 | 26.30 | 16.31 | 100 | 194 | V |
| 2432.0 | 44.1 | 34.5 | 1.61 | 45.66 | 36.09 | 76.0 | 56.0 | 30.34 | 19.91 | 100 | 136 | V |
| 4962.0 | 39.4 | 26.4 | 12.34 | 51.78 | 38.77 | 80.0 | 60.0 | 28.22 | 21.23 | 100 | 85 | V |

Radiated Emission (Above 1 GHz) _ Capture mode (PoE)

EUT/Model No.: DC-Y6513RX

Temp/Humi: 21 / 37


Test Mode : Capture mode(POE)

Tested by: CHOI M Y

Data: 282

File: C:\Program Files (x86)\e3\1811-1.EM6 (282)

Date: 2018-11-02

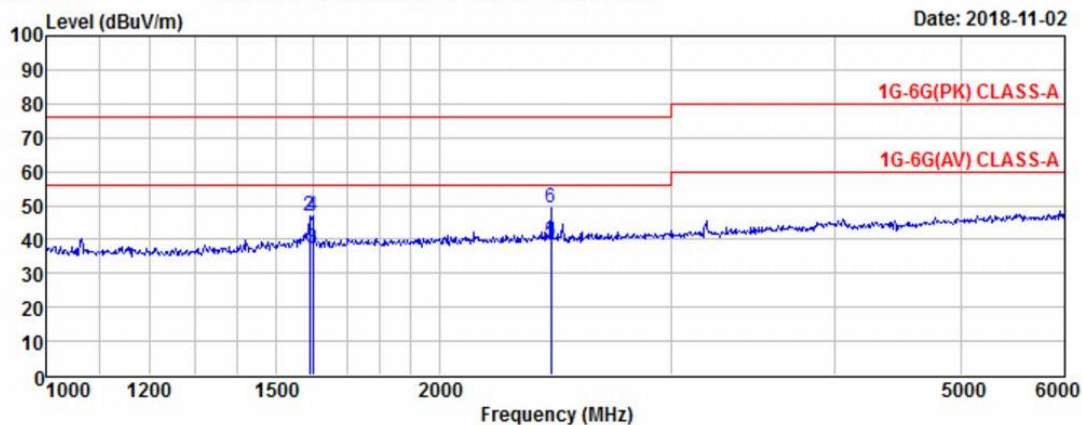

EUT/Model No.: DC-Y6513RX

Temp/Humi: 21 / 37


Test Mode : Capture mode(POE)

Tested by: CHOI M Y

Data: 152

File: C:\Program Files (x86)\e3\1811-1.EM6 (282)

Date: 2018-11-02

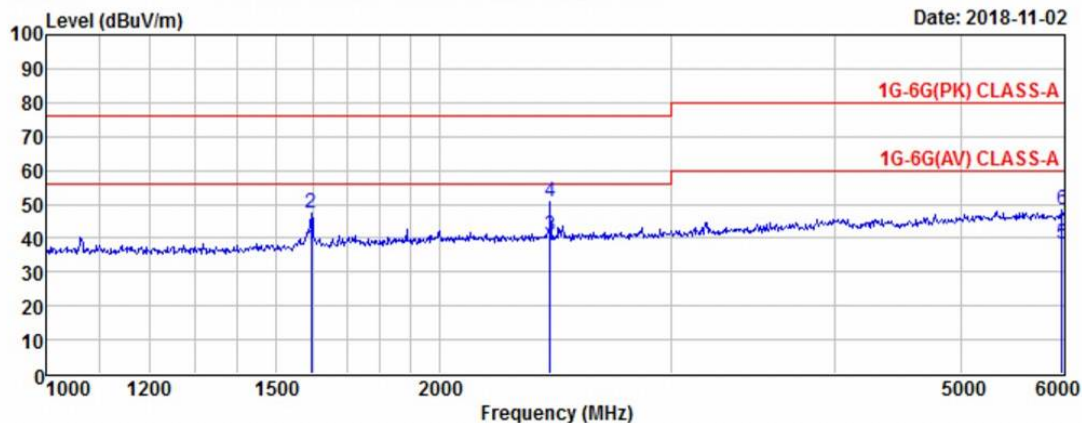

Manufacture : IDIS CO., LTD.

Test Date

Temp.: Humidity Distance

[°C] : [%] (m)

2018-11-02

21

37

3.8

Model : DC-Y6513RX

TEST mode : Capture mode

Ver Data: 282

Hor Data: 152

| Freq.(MHz) | Reading(PK) | Reading(AV) | C.F | Result(PK) | Result(AV) | Limit(PK) | Limit(AV) | Margin(PK) | Margin(AV) | Height | Angle | Polarity |
|------------|-------------|-------------|-------|------------|------------|-----------|-----------|------------|------------|--------|-------|----------|
| MHz | dBuV | dBuV | dB | dBuV/m | dBuV/m | dBuV/m | dBuV/m | dB | dB | cm | deg | Hor/Ver |
| 1593.0 | 53.7 | 43.7 | -3.96 | 49.74 | 39.73 | 76.0 | 56.0 | 26.26 | 16.27 | 100 | 174 | H |
| 2427.0 | 35.3 | 25.3 | 1.04 | 36.30 | 26.33 | 76.0 | 56.0 | 39.70 | 29.67 | 100 | 69 | H |
| 5967.0 | 35.3 | 25.2 | 14.91 | 50.21 | 40.06 | 80.0 | 60.0 | 29.79 | 19.94 | 100 | 118 | H |
| 1590.0 | 52.8 | 42.8 | -3.95 | 48.83 | 38.83 | 76.0 | 56.0 | 27.17 | 17.17 | 100 | 228 | V |
| 1599.0 | 52.7 | 43.5 | -3.94 | 48.75 | 39.59 | 76.0 | 56.0 | 27.25 | 16.41 | 100 | 289 | V |
| 2432.0 | 50.1 | 40.1 | 1.08 | 51.20 | 41.20 | 76.0 | 56.0 | 24.80 | 14.80 | 100 | 39 | V |

3.2.3 Harmonic Current (AC power input port)

Definition:

This part deals with the Limitation of harmonic currents injected into the public supply system.


We were performed the test according to LTA procedure LTA-QI-04.

| | |
|-------------|--------------------------|
| Test method | : EN 61000-3-2:2014 |
| Test mode | : Capture mode (Adapter) |
| Rated power | : 3.723 W |
| Result | : Not Applicable |

Measurement Data:

- We did not test EN61000-3-2 (Harmonic current emissions) for the DC-Y6513RX because equipment whose rated power is less or equal 75W don't need to be tested.

Harmonic Current (AC power input port) / Capture mode (Adapter)

| | | | |
|-----------------------------------------------------------------------------------|-----------------------------------------|----------------------------------------------------------|---------------|
| 07th November 2018 - 17:54:55 | | Page 1/1 | IECSoft v2_5a |
|  | | IEC61000-3-2:2014 Fluctuating Harmonics | |
| Instrument Details | | | |
| Instrument Model | PPA5511 | | |
| Serial Number | 162-04957 | | |
| Firmware Version | 2.168 | | |
| N4L Calibration Date | 18th September 2017 | | |
| Instrument Version | Standard | | |
| Test Settings | | | |
| Class | Class A | | |
| Mode | Measured | | |
| Equipment Under Test | | | |
| Brand | IDIS CO., LTD. | | |
| Model | DC-Y6513RX | | |
| Serial | N/A | | |
| Impedance Network ID | N/A | | |
| Test Conditions | | | |
| | User Entered | Measured | |
| Rated Voltage | N/A | 230.853V | |
| Rated Current | N/A | 49.022mA | |
| Rated Frequency | N/A | 50.000Hz | |
| Rated Power | N/A | 3.723W | |
| Additional Test Information | | | |
| Measured Power Factor | 0.329 | | |
| Max Current THD | 260.00% | | |
| Max THC | 53.626mA | | |
| Max Power | 3.768W | | |
| Max F.Current | 21.936mA | | |
| Average F.Current | 21.067mA | | |
| Minimum Current | 100A | | |
| Test Duration | 2.5 minutes | | |
| Additional Test Details | | | |
| Operator | N/A | | |
| Lab Name | N/A | | |
| Location | N/A | | |
| Notes | | | |
| Signature | | | |
| Results | Test - N/A. Rated Power < 75W | | |

Test not applicable

With the exception of lighting equipment section 7 of the IEC61000-3-2:2014 standard declares that no Harmonic current limits are specified for equipment with a rated power of

3.2.4 Voltage Variation and Flicking (AC power input port)

Definition:

This section is concerned with the limitation of voltage fluctuations and flicker impressed on the public low-voltage system.


We were performed the test according to LTA procedure LTA-QI-04.

| | |
|-------------|--------------------------|
| Test method | : EN 61000-3-3:2013 |
| Test mode | : Capture mode (Adapter) |
| Result | : Complies |

Measurement Data:

- Refer to the Next page

Voltage Variation and Flicking (AC power input port) / Capture mode (Adapter)

| | | | |
|-----------------------------------------------------------------------------------|-------------------------|--------------------------------------------------------|---------------|
| 07th November 2018 - 18:12:26 | | Page 1/2 | IECSoft v2_5a |
|  | | IEC61000-3-3:2013 Ed.3.0 Flickermeter | |
| Instrument Details | | | |
| Instrument Model | PPA5511 | | |
| Serial Number | 162-04957 | | |
| Firmware Version | 2.168 | | |
| N4L Calibration Date | 18th September 2017 | | |
| Instrument Version | Standard | | |
| Test Settings | | | |
| Class | Voltage | | |
| Mode | Normal (4%) | | |
| Minimum Current | 10A | | |
| PST | 10.00 minutes | | |
| PLT | 12 PSTs | | |
| Equipment Under Test | | | |
| Brand | IDIS CO., LTD. | | |
| Model | DC-Y6513RX | | |
| Serial | N/A | | |
| Impedance Network ID | N/A | | |
| Test Conditions | | | |
| | User Entered | Measured | |
| Rated Voltage | N/A | 230.859V | |
| Rated Current | N/A | N/A | |
| Rated Frequency | N/A | 50.000Hz | |
| Rated Power | N/A | N/A | |
| D max | 0.0628% (Limit: 4.0%) | | |
| T max | 0.0000 s (Limit: 0.5 s) | | |
| DC max | 0.0010% (Limit: 3.3%) | | |
| Additional Test Details | | | |
| Operator | N/A | | |
| Lab Name | N/A | | |
| Location | N/A | | |
| Notes | | | |
| Signature | | | |
| Results | Phase1: PASS | | |

| | | | | | | | | |
|---------------------------------------|--------------|----------------|----------|---------------|-------|---------------|-------|---------|
| 07th November 2018 - 18:12:26 | | | | Ph:1 Page 2/2 | | IECSoft v2_5a | | |
| IEC61000-3-3:2013 Ed.3.0 Flickermeter | | | | | | | | |
| Instrument Details | | | | | | | | |
| Instrument Model | | PPA5511 | | | | | | |
| Instrument Serial | | 162-04957 | | | | | | |
| Instrument Firmware | | 2.168 | | | | | | |
| Equipment Under Test | | | | | | | | |
| Brand | | IDIS CO., LTD. | | | | | | |
| Model | | DC-Y6513RX | | | | | | |
| Serial | | N/A | | | | | | |
| Flicker Test Results | | | | | | | | |
| PST no. | Status | DC (%) | Dmax (%) | Tmax (s) | PST | PST Lim | PLT | PLT Lim |
| 1 | Phase1: PASS | 0.001 | 0.05202 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 2 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 3 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 4 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 5 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 6 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 7 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 8 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 9 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 10 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 11 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | N/A |
| 12 | Phase1: PASS | 0.001 | 0.06279 | 0 | 0.082 | 1.00 | 0.082 | 0.65 |

3.3 IMMUNITY

3.3.1 Electrostatic Discharge

Definition:

The test assesses the ability of the EUT to operate as intended in the event of an electrostatic discharge.

We were performed the test according to LTA procedure LTA-QI-04.

| | |
|---------------------------------------|----------------------------------------------------------|
| Test date | : 2019.11.06. |
| Test method | : EN 61000-4-2 :2009 |
| Temperature / Humidity / Pressure | : 22 °C / 41 % R.H. / 100 kPa |
| Discharge Impedance | : $(330 \pm 10\%) \Omega / (150 \pm 10\%) \text{ pF}$ |
| Type of Discharge (air discharge) | : $\pm 2 \text{ kV}, \pm 4 \text{ kV}, \pm 8 \text{ kV}$ |
| Type of Discharge (contact discharge) | : $\pm 6 \text{ kV}$ |
| Number of discharges at each point | : 10 of each polarity |
| Discharge Repetition on Rate | : 1 / sec |
| Test mode | : Capture mode (Adapter), Capture mode (PoE) |
| Result | : Complies |

Measurement Data:

- Refer to the Next page

1-1. Indirect Discharge

| No. | Position | Kind of Discharge | Results | Remarks |
|-----|----------|-------------------|----------|------------------------|
| 1 | HCP | Contact | Complies | No reaction recognized |
| 2 | VCP | Contact | Complies | No reaction recognized |



1-2. Direct Discharge

| No. | Position | Kind of Discharge | Result | Remarks |
|-----|--------------|-------------------|----------|------------------------|
| 1 | Enclosure | Air | Complies | No reaction recognized |
| 2 | LENS | Air | Complies | No reaction recognized |
| 3 | Audio IN/OUT | Air | Complies | No reaction recognized |
| 4 | Alarm | Air | Complies | No reaction recognized |
| 5 | Adapter | Air | Complies | No reaction recognized |
| 6 | LAN | Air | Complies | No reaction recognized |

※ Results are complies in each test mode.

- ← Air discharge
← Contact discharge

ESD TEST POINT

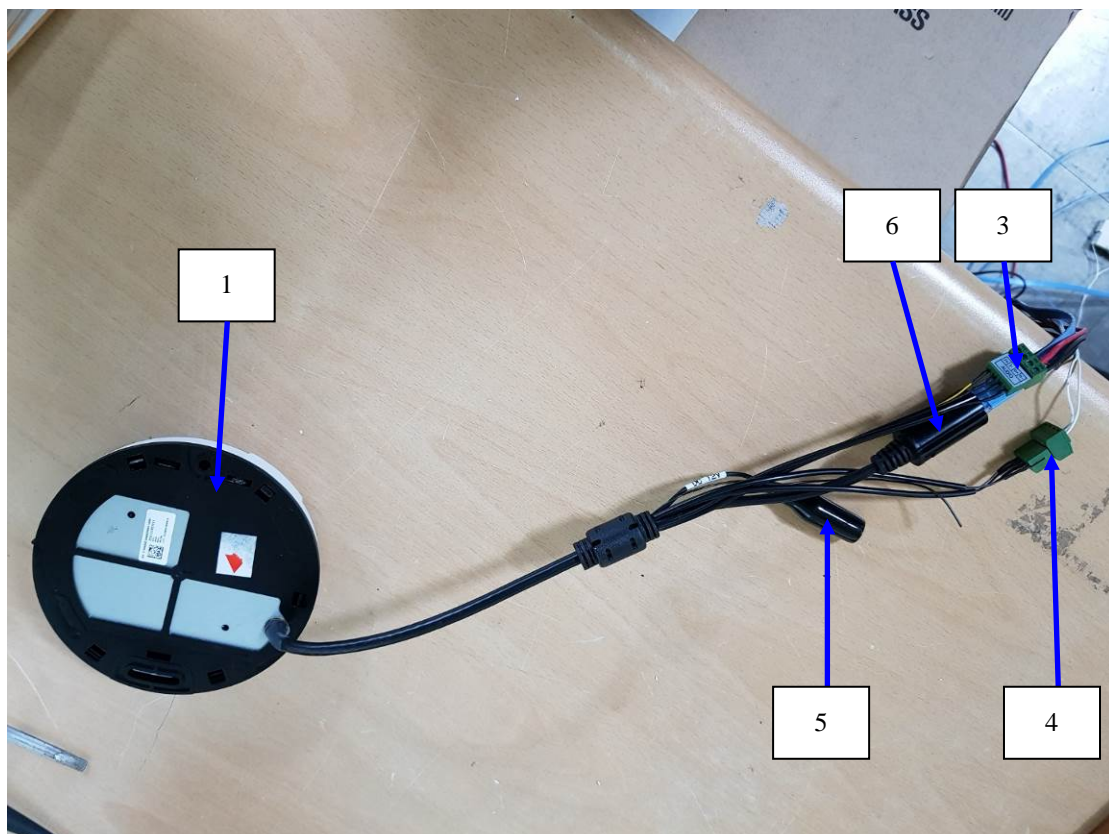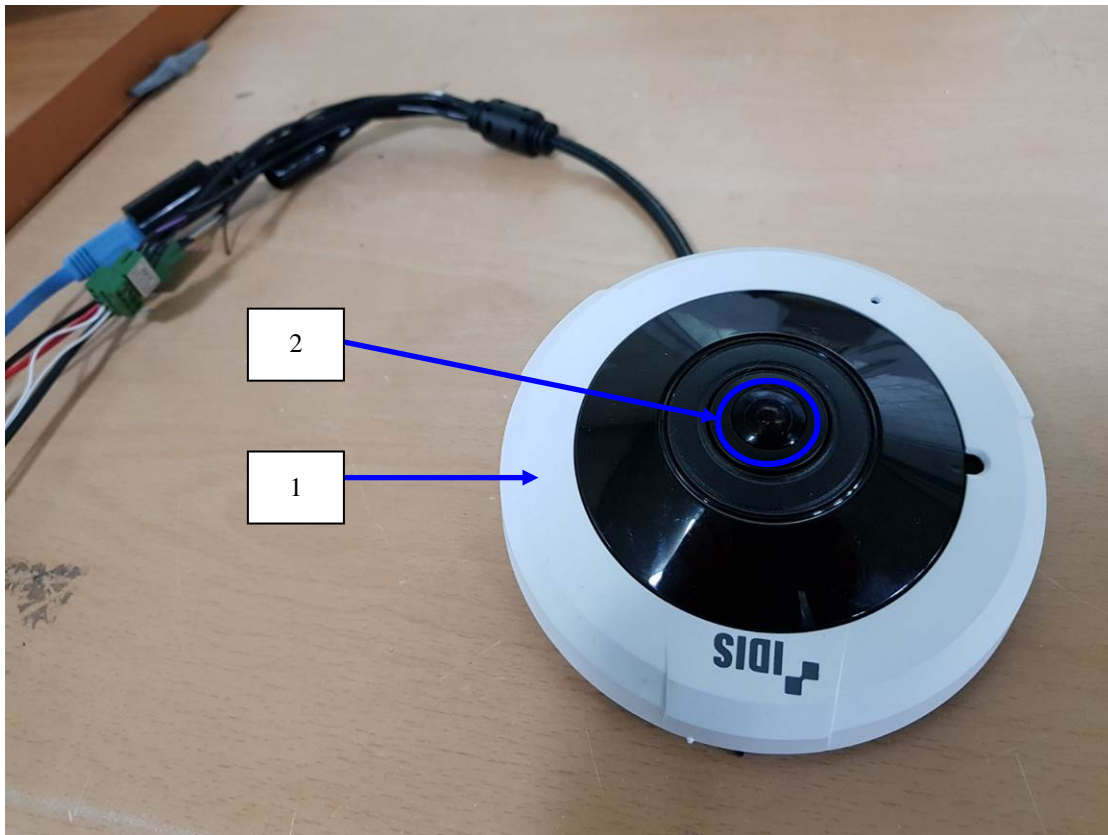

3.3.2 RF Electromagnetic Field

Definition:

The test assesses the ability of the EUT to operate as intended in the presence of a radio frequency electromagnetic field disturbance.

We were performed the test according to LTA procedure LTA-QI-04.

| | | |
|-----------------------------------|---|-------------------------------------------------------------|
| Test date | : | 2018.11.05. |
| Test method | : | EN 61000-4-3:2006/A1:2008/A2:2010 |
| Temperature / Humidity / Pressure | : | 22 °C / 50 % R.H. / 101 kPa |
| Frequency range | : | 80 MHz to 2,700 MHz |
| Test level | : | 10 V/m (measured unmodulated) |
| Amplitude Modulation | : | AM, 80 %, 1 kHz Sinusoidal PM, 1 Hz (0.5s ON : 0.5s OFF) |
| Step size | : | 1 % of fundamental |
| Dwell Time | : | 3 s |
| Test mode | : | Capture mode (Adapter), Capture mode (PoE) |
| Result | : | Complies |

Measurement Data:

MODE : Capture mode (Adapter)

| Port | Side | Result | Remarks |
|------------|-------|----------|------------------------|
| Horizontal | Front | Complies | No reaction recognized |
| | Left | Complies | No reaction recognized |
| | Rear | Complies | No reaction recognized |
| | Right | Complies | No reaction recognized |
| Vertical | Front | Complies | No reaction recognized |
| | Left | Complies | No reaction recognized |
| | Rear | Complies | No reaction recognized |
| | Right | Complies | No reaction recognized |

| Audio Port | Result | Remarks |
|------------|----------|------------------------|
| AUDIO OUT | Complies | No reaction recognized |

MODE : Capture mode (PoE)

| Port | Side | Result | Remarks |
|------------|-------|----------|------------------------|
| Horizontal | Front | Complies | No reaction recognized |
| | Left | Complies | No reaction recognized |
| | Rear | Complies | No reaction recognized |
| | Right | Complies | No reaction recognized |
| Vertical | Front | Complies | No reaction recognized |
| | Left | Complies | No reaction recognized |
| | Rear | Complies | No reaction recognized |
| | Right | Complies | No reaction recognized |

| Audio Port | Result | Remarks |
|------------|----------|------------------------|
| AUDIO OUT | Complies | No reaction recognized |

※ Results are complies in each test mode.

3.3.3 Electrical fast transients

Definition:

The test assesses the ability of the EUT to operate as intended in the event of fast transients presence on one of the input/output ports.

We were performed the test according to LTA procedure LTA-QI-04.

| | | |
|-----------------------------------|---|------------------------------------------------------|
| Test date | : | 2018.11.06. |
| Test method | : | EN 61000-4-4:2012 |
| Temperature / Humidity / Pressure | : | 22 °C / 46 % R.H. / 100 kPa |
| Cable length | : | > 3 m |
| Test level | : | 2.0 kV (AC power input port) 1.0 kV (Signal port) |
| Polarity | : | Negative/ positive |
| Repetition frequency | : | 100 kHz |
| Test mode | : | Capture mode (Adapter), Capture mode (PoE) |
| Result | : | Complies |

Measurement Data:

MODE : Capture mode (Adapter)

| AC power Line | Test level | Result | Remarks |
|---------------|------------|----------|------------------------|
| L – N - PE | ± 2 kV | Complies | No reaction recognized |

| Signal Line | Test level | Result | Remarks |
|-------------|------------|----------|------------------------|
| LAN | ± 1 kV | Complies | No reaction recognized |

MODE : Capture mode (PoE)

| Signal Line | Test level | Result | Remarks |
|-------------|------------|----------|------------------------|
| PoE | ± 1 kV | Complies | No reaction recognized |

※ Results are complies in each test mode.

3.3.4 Surge

Definition:

The test assesses the ability of the EUT to operate as intended in the event of surge presence on the AC main power input ports.

We were performed the test according to LTA procedure LTA-QI-04.

| | | |
|-----------------------------------|---|----------------------------------------------------------------------------------------------------------------|
| Test date | : | 2018.11.06. |
| Test method | : | EN 61000-4-5:2014/A1:2017 |
| Temperature / Humidity / Pressure | : | 22 °C / 51 % R.H. / 100 kPa |
| Test level | : | ± 0.5 kV, ±1 kV (line to line) ± 0.5 kV, ± 1 kV, ± 2 kV (line to ground), ± 0.5 kV, ± 1 kV (signal line) |
| Polarity | : | Negative/ positive |
| Wave shape | : | 1.2/ 50 µs pulse |
| Number of surges | : | 5 (at each phase) |
| Test mode | | Capture mode (Adapter), Capture mode (PoE) |
| Result | : | Complies |

Measurement Data:

MODE : Capture mode (Adapter)

| Phase | Line | level | Result | Remark |
|-------|-----------------------|--------------------|----------|------------------------|
| 0° | Line(L) to line(N) | ± 0.5, 1.0 kV | Complies | No reaction recognized |
| | Line(L) to ground(PE) | ± 0.5, 1.0, 2.0 kV | Complies | No reaction recognized |
| | Line(N) to ground(PE) | ± 0.5, 1.0, 2.0 kV | Complies | No reaction recognized |
| 90° | Line(L) to line(N) | ± 0.5, 1.0 kV | Complies | No reaction recognized |
| | Line(L) to ground(PE) | ± 0.5, 1.0, 2.0 kV | Complies | No reaction recognized |
| | Line(N) to ground(PE) | ± 0.5, 1.0, 2.0 kV | Complies | No reaction recognized |
| 180° | Line(L) to line(N) | ± 0.5, 1.0 kV | Complies | No reaction recognized |
| | Line(L) to ground(PE) | ± 0.5, 1.0, 2.0 kV | Complies | No reaction recognized |
| | Line(N) to ground(PE) | ± 0.5, 1.0, 2.0 kV | Complies | No reaction recognized |
| 270° | Line(L) to line(N) | ± 0.5, 1.0 kV | Complies | No reaction recognized |
| | Line(L) to ground(PE) | ± 0.5, 1.0, 2.0 kV | Complies | No reaction recognized |
| | Line(N) to ground(PE) | ± 0.5, 1.0, 2.0 kV | Complies | No reaction recognized |

| Signal Line | level | Result | Remark |
|-------------|---------------|----------|------------------------|
| LAN | ± 0.5, 1.0 kV | Complies | No reaction recognized |

MODE : Capture mode (PoE)

| Signal Line | level | Result | Remark |
|-------------|---------------------------|----------|------------------------|
| PoE | $\pm 0.5, 1.0 \text{ kV}$ | Complies | No reaction recognized |

※ Results are complies in each test mode.

3.3.5 Conducted disturbances, induced by radio-frequency fields

Definition:

The test assesses the ability of the EUT to operate as intended in the presence of a radio frequency electromagnetic disturbance on the input/output ports.

We were performed the test according to LTA procedure LTA-QI-04.

| | | |
|-----------------------------------|---|-------------------------------------------------------------|
| Test date | : | 2018.11.06. |
| Test method | : | EN 61000-4-6:2014/AC:2015 |
| Temperature / Humidity / Pressure | : | 22 °C / 49 % R.H. / 100 kPa |
| Frequency range | : | 0.15MHz – 100 MHz |
| Test level | : | 10 Vrms unmodulated |
| Amplitude Modulation | : | AM, 80 %, 1 kHz Sinusoidal PM, 1 Hz (0.5s ON : 0.5s OFF) |
| Step size | : | 1 % of fundamental. |
| Test mode | : | Capture mode (Adapter), Capture mode (PoE) |
| Result | : | Complies |

Measurement Data:

MODE : Capture mode (Adapter)

| Port | Test level (Vrms) | Result | Remarks |
|------------|-------------------|----------|------------------------|
| Power Line | 10 | Complies | No reaction recognized |

| Signal Port | Test level (Vrms) | Result | Remarks |
|-------------|-------------------|----------|------------------------|
| LAN | 10 | Complies | No reaction recognized |

| Audio Port | Test level (Vrms) | Result | Remarks |
|------------|-------------------|----------|------------------------|
| Audio OUT | 10 | Complies | No reaction recognized |

MODE : Capture mode (PoE)

| Port | Test level (Vrms) | Result | Remarks |
|------|-------------------|----------|------------------------|
| PoE | 10 | Complies | No reaction recognized |

| Audio Port | Test level (Vrms) | Result | Remarks |
|------------|-------------------|----------|------------------------|
| Audio OUT | 10 | Complies | No reaction recognized |

※ Results are complies in each test mode.

3.3.6 Mains supply voltage dips, short interruptions

Definition:

The test assesses the ability of the EUT to operate as intended in the event of voltage dips and interruptions present on the AC mains power input ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date : 2018.11.06.
 Test method : EN 61000-4-11:2004/A1:2017
 Temperature / Humidity / Pressure : 23 °C / 51 % R.H. / 100 kPa
 Ut : 230 Vac
 Test mode : Capture mode (Adapter)
 Result : **Complies**

Measurement Data:

MODE : Capture mode (Adapter)

| Test Level %Ut | Voltage droop and interruptions %Ut | Duration of Reduction (period) | Result | Remarks |
|-------------------|-------------------------------------------|---------------------------------------|----------|---------------------------------------------------------------------------------------------------------------|
| 80 | 20 | 250 | Complies | No reaction recognized |
| 70 | 30 | 25 | Complies | No reaction recognized |
| 40 | 60 | 10 | Complies | No reaction recognized |
| 0 | 100 | 250 | Complies | EUT OFF during the test. Re-operated without user's control. After the test, EUT was operated normally. |

3.3.7 Mains supply voltage variations

Definition:

The test assesses the ability of the EUT to operate as intended in the event of voltage variations present on the AC mains power input ports.

We were performed the test according to LTA procedure LTA-QI-04.

| | | |
|-----------------------------------|---|-----------------------------|
| Test date | : | 2018.11.06. |
| Test method | : | EN 50130-4:2011/A1:2014 |
| Temperature / Humidity / Pressure | : | 23 °C / 51 % R.H. / 100 kPa |
| Supply Voltage maximum | : | $U_{nom} + 10 \%$ |
| Supply Voltage minimum | : | $U_{nom} - 15 \%$ |
| Ut | : | 230 Vac |
| Test mode | : | Capture mode (Adapter) |
| Result | : | Complies |

Measurement Data:

U_{nom} = Nominal mains voltage. Where provision is made to adapt the equipment to suit a number of nominal supply voltages (e.g. by transformer tap changing), the above conditioning severity shall be applied for each nominal voltage, with the equipment suitably adapted. For equipment which is claimed to be suitable for a range of nominal mains voltages (e.g. 220/240 V) without adaptation, $U_{max} = (\text{Maximum } U_{nom}) + 10 \%$, and $U_{min} = (\text{Minimum } U_{nom}) - 15 \%$. In any case the range of U_{nom} must include the European nominal mains voltage of 230 V.

2 Mains supply voltage variations

MODE : Capture mode (Adapter) / 230 V, 50 Hz

| Test LevelCondition | | Test Level (V) | Result | Remarks |
|---------------------|------|----------------|----------|------------------------|
| Unom | +10% | 253 | Complies | No reaction recognized |
| Unom | -15% | 195.5 | Complies | No reaction recognized |

APPENDIX A

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment are identified by the Test Laboratory.

Conducted emissions

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|-------------------|------------------|-----------------|-------------|------------|----------|
| <input checked="" type="checkbox"/> | EMI TEST Receiver | ESR | Rohde & Schwarz | 101499 | 2019.07.11 | 1 year |
| <input checked="" type="checkbox"/> | Pulse Limiter | ESH3-Z2 | Rohde & Schwarz | 100710 | 2019.03.19 | 1 year |
| <input type="checkbox"/> | LISN | ESH3-Z6 | Rohde & Schwarz | 100378 | 2019.09.07 | 1 year |
| <input type="checkbox"/> | LISN | ESH3-Z6 | Rohde & Schwarz | 101468 | 2019.09.07 | 1 year |
| <input checked="" type="checkbox"/> | LISN | ENV216 | Rohde & Schwarz | 100408 | 2019.10.10 | 1 year |
| <input checked="" type="checkbox"/> | LISN | LT32C/10 | AFJ | 32031518210 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | TEST PROGRAM | e3_Ver: 5.5.201a | AUDIX | - | - | - |
| <input checked="" type="checkbox"/> | ISN | ISN T800 | TESEQ | 27109 | 2019.09.12 | 1 year |
| <input type="checkbox"/> | ISN | ENY81-CA6 | Rohde & Schwarz | 101565 | 2019.09.12 | 1 year |
| <input type="checkbox"/> | CURRENT PROBE | EZ-17 | Rohde & Schwarz | 100508 | 2019.09.06 | 1 year |

Radiated Emission – Below 1 GHz

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|-------------------|-----------------------|-----------------|------------|-----------------------|----------|
| <input checked="" type="checkbox"/> | EMI TEST Receiver | ESCI7 | Rohde & Schwarz | 100772 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | Amplifier (25 dB) | 8447D | HP | 2944A07684 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | TRILOG Antenna | VULB9160 | SCHWARZBECK | 9160-3237 | 2019.05.16 (KOLAS) | 2 year |
| <input checked="" type="checkbox"/> | TEST PROGRAM | e3_Ver: 6.2009-10-12a | AUDIX | - | - | - |

Radiated Emission – Above 1 GHz

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|-------------------|-----------------------|-----------------|------------|-----------------------|----------|
| <input checked="" type="checkbox"/> | EMI TEST Receiver | ESCI7 | Rohde & Schwarz | 100772 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | Amplifier | 8449B | HP | 3008A00671 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | HORN ANTENNA | 3115 | ETS | 114105 | 2019.11.03 (KOLAS) | 2 year |
| <input checked="" type="checkbox"/> | TEST PROGRAM | e3_Ver: 6.2009-10-12a | AUDIX | - | - | - |

Harmonic Current / Voltage Variation and Flicking

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|-----------------------------|------------|----------------|------------|------------|----------|
| <input checked="" type="checkbox"/> | Precision Power Analyzer | PPA5511 | Newtons4th Ltd | 162-04957 | 2019.09.10 | 1 year |
| <input checked="" type="checkbox"/> | Reference Impedance Network | ES4152 | NF Corp. | 9074424 | 2019.09.07 | 1 year |

Electrostatic Discharge

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|---------------|------------|--------------|------------|------------|----------|
| <input checked="" type="checkbox"/> | ESD Simulator | ESS-2000 | NOISEKEN | 8000C03241 | 2019.09.11 | 1 year |
| <input checked="" type="checkbox"/> | ESD GUN | TC-815R | NOISEKEN | ESS0564361 | 2019.09.11 | |

RF Electromagnetic Field

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|-----------------------------------|---------------|--------------|-----------------|------------|----------|
| <input checked="" type="checkbox"/> | Signal Generator | E4432B | Agilent | MY41310632 | 2019.05.15 | 1 year |
| <input checked="" type="checkbox"/> | Power Meter | E4419B | Agilent | GB38410133 | 2019.05.15 | 1 year |
| <input checked="" type="checkbox"/> | Power Sensor | E9300A | Agilent | MY41497992 | 2019.05.15 | 1 year |
| <input checked="" type="checkbox"/> | Power Sensor | E9300A | Agilent | MY41497618 | 2019.05.15 | 1 year |
| <input checked="" type="checkbox"/> | RF POWER AMPLIFIER | ITA0300KL-300 | INFINITECH | 0300KL 1507 001 | - | - |
| <input checked="" type="checkbox"/> | RF POWER AMPLIFIER | ITA2000KL-120 | INFINITECH | 200KL 1507 001 | - | - |
| <input checked="" type="checkbox"/> | RF POWER AMPLIFIER | ITA4500KL-70 | INFINITECH | 4500KL 1507 001 | - | - |
| <input checked="" type="checkbox"/> | RF POWER AMPLIFIER | ITA0750KL-300 | INFINITECH | 0750KL 1507 001 | - | - |
| <input checked="" type="checkbox"/> | Log.-Per.Antenna (80 MHz ~ 3 GHz) | K9128 | RAPA | NONE | - | - |
| <input checked="" type="checkbox"/> | Signal Generator | SMB 100A | R&S | 177621 | 2019.03.19 | 1 year |
| <input checked="" type="checkbox"/> | HORN ANTENNA | 3115 | ETS | 00055005 | - | - |
| <input checked="" type="checkbox"/> | Sound Acoustic Tester | TST-1000 | TESTEK | 150065-A | 2019.09.11 | 1 year |
| <input type="checkbox"/> | Microphone | MPA201 | BSWA | 530147 | 2019.09.13 | |

Electrical fast transients

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|---------------------------|------------|--------------|-------------|------------|----------|
| <input checked="" type="checkbox"/> | Compact Generator | Compact NX | EMTEST | P1725200196 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | AC Power Source | Variac NX | EMTEST | P1745207276 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | Capacitive Coupling Clamp | CCI | EMTEST | P1744207071 | 2019.09.06 | 1 year |

Surge

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|-------------------|------------|--------------|-------------|------------|----------|
| <input checked="" type="checkbox"/> | Compact Generator | Compact NX | EMTEST | P1725200196 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | AC Power Source | Variac NX | EMTEST | P1745207276 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | CDN | CNV 508T5 | EMTEST | P1742204978 | 2019.09.07 | 1 year |
| <input type="checkbox"/> | CDN | CNV 508N1 | EMTEST | P1742204940 | 2019.09.07 | |

Conducted disturbances, induced by radio-frequency fields

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|-----------------------|--------------|--------------|-------------|------------|----------|
| <input checked="" type="checkbox"/> | Signal generator | SML03 | R&S | 103026/0013 | 2019.03.19 | 1 year |
| <input checked="" type="checkbox"/> | POWER METER | NRVD | R&S | 101689 | 2019.03.19 | 1 year |
| <input checked="" type="checkbox"/> | POWER Sensor | URV5-Z2 | R&S | 100755 | 2019.03.19 | 1 year |
| <input checked="" type="checkbox"/> | POWER Sensor | URV5-Z2 | R&S | 100756 | 2019.03.19 | 1 year |
| <input checked="" type="checkbox"/> | RF Power Amplifier | FLL75A | FRANKONIA | 1033 | - | - |
| <input checked="" type="checkbox"/> | EM INJECTION CLAMP | TSIC-23 | F.C.C | 529 | 2019.05.16 | 1 year |
| <input type="checkbox"/> | CDN (M1) | TSCDN-M1-16A | F.C.C | 07004 | 2019.09.06 | 1 year |
| <input type="checkbox"/> | CDN (M2) | TSCDN-M2-16A | F.C.C | 07008 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | CDN (M3) | TSCDN-M3-16A | F.C.C | 07017 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | Sound Acoustic Tester | TST-1000 | TESTEK | 15065-A | 2019.09.11 | 1 year |
| <input type="checkbox"/> | Microphone | MP201 | BSWA | 530147 | 2019.09.13 | |

Mains supply voltage dips, short interruptions

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|-------------------|------------|--------------|-------------|------------|----------|
| <input checked="" type="checkbox"/> | Compact Generator | Compact NX | EMTEST | P1725200196 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | AC Power Source | Variac NX | EMTEST | P1745207276 | 2019.09.06 | 1 year |

Mains supply voltage variations

| | Item | Model Name | Manufacturer | Serial No. | Next Cal. | Interval |
|-------------------------------------|-------------------|------------|--------------|-------------|------------|----------|
| <input checked="" type="checkbox"/> | Compact Generator | Compact NX | EMTEST | P1725200196 | 2019.09.06 | 1 year |
| <input checked="" type="checkbox"/> | AC Power Source | Variac NX | EMTEST | P1745207276 | 2019.09.06 | 1 year |

APPENDIX B

PERFORMANCE CRITERIA

Performance criteria

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of the bursts is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

Slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of the surges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at $U_0 = 130 \text{ dB}\mu\text{V}$.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at $U_0 = 140 \text{ dB}\mu\text{V}$, providing

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable settings, etc.)

(b) at $U_0 = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used, and

(c) there is no observable deterioration of the picture at $U_0 = 120 \text{ dB}\mu\text{V}$.

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

Voltage dip/interruption

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

It is permitted to use ancillary equipment (e.g. A UPS) to meet the requirements of this clause. This shall be detailed in the test report and the manufacturer's installation manual.

Signaling a mains fault during the 100 % voltage reduction test is permitted.

Mains supply voltage variations

There shall be no damage, malfunction or change of status due to the different supply voltage conditions. The EUT shall meet the acceptance criteria for the functional test(see Clause 6), during the conditioning.

APPENDIX C

PHOTOGRAPHS

Conducted emission (Maximum emission configuration) / Capture mode (Adapter)





Conducted emission (Maximum emission configuration) _ TEL / Capture mode (Adapter)





Conducted emission (Maximum emission configuration) _ TEL / Capture mode (PoE)





Radiated emission (Maximum emission configuration)-Below 1 GHz / Capture mode (Adapter)

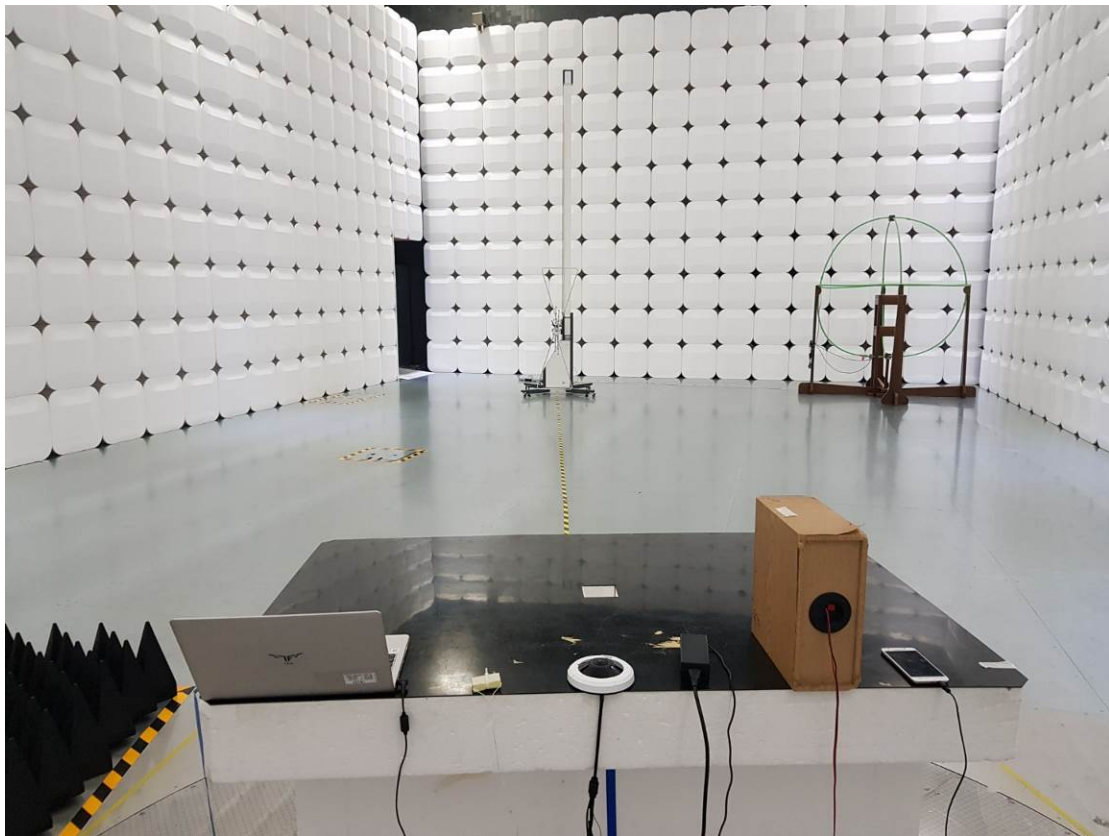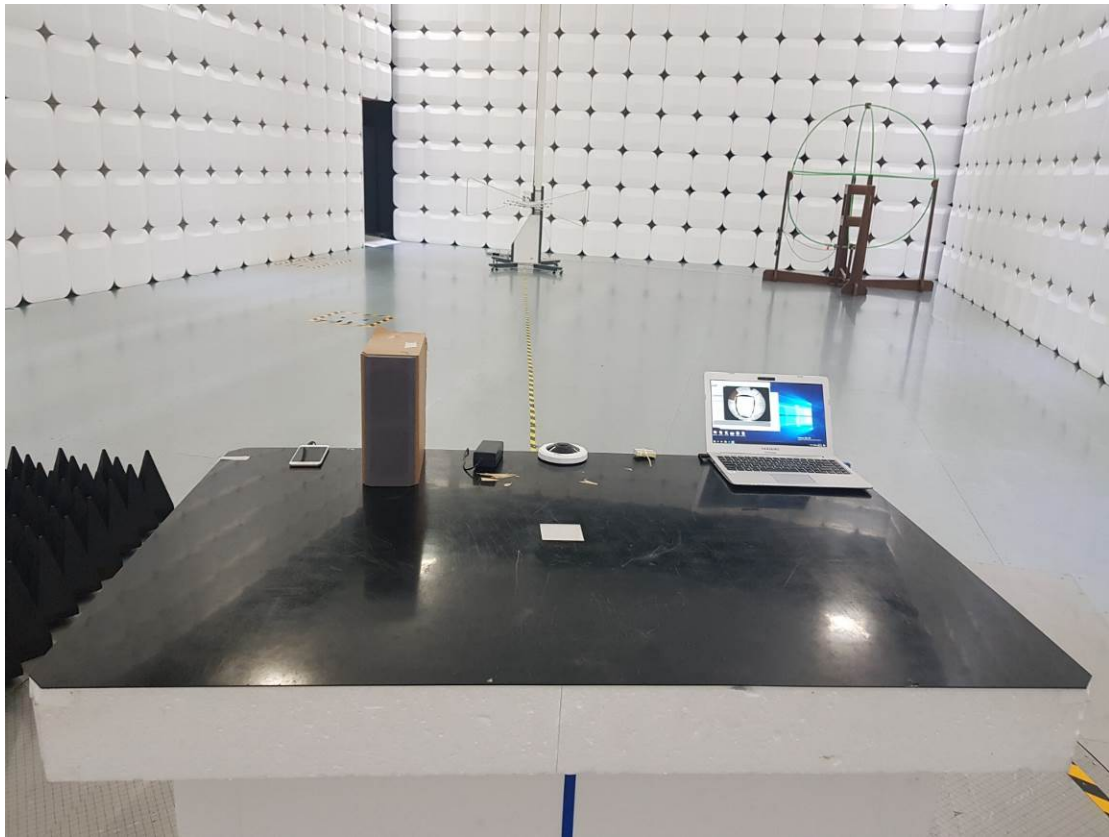



Radiated emission (Maximum emission configuration)-Below 1 GHz / Capture mode (PoE)

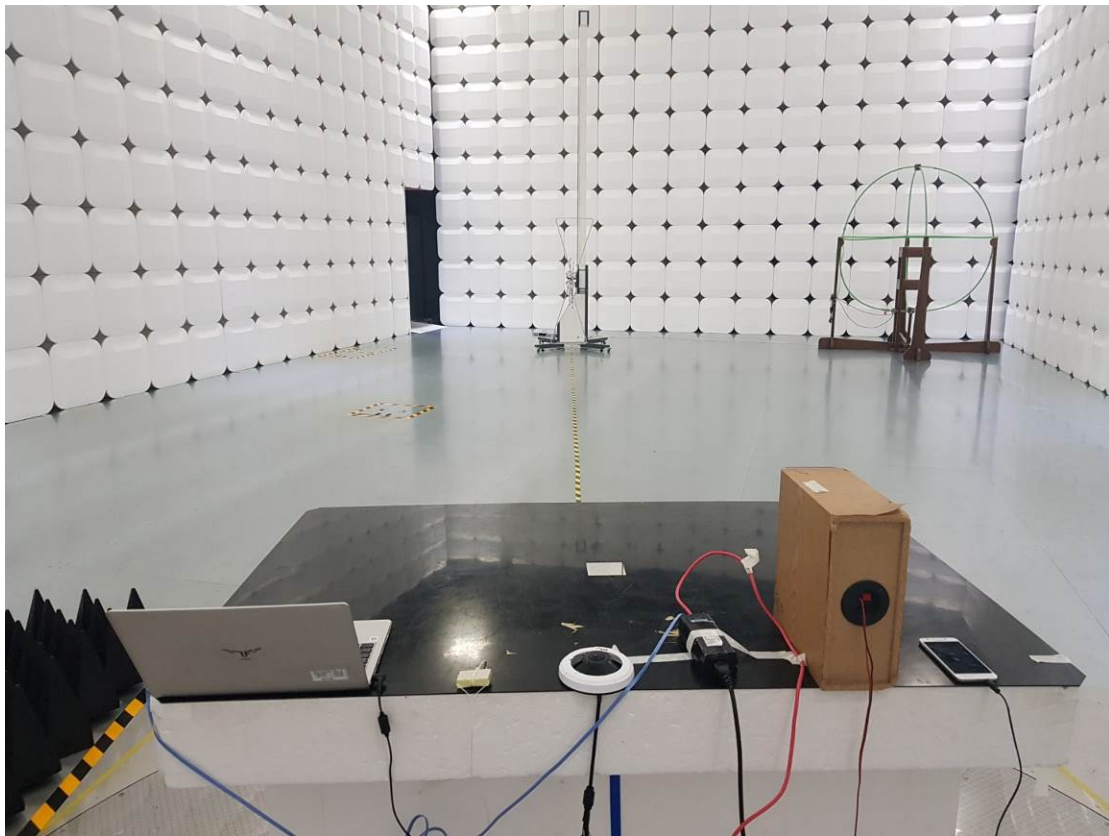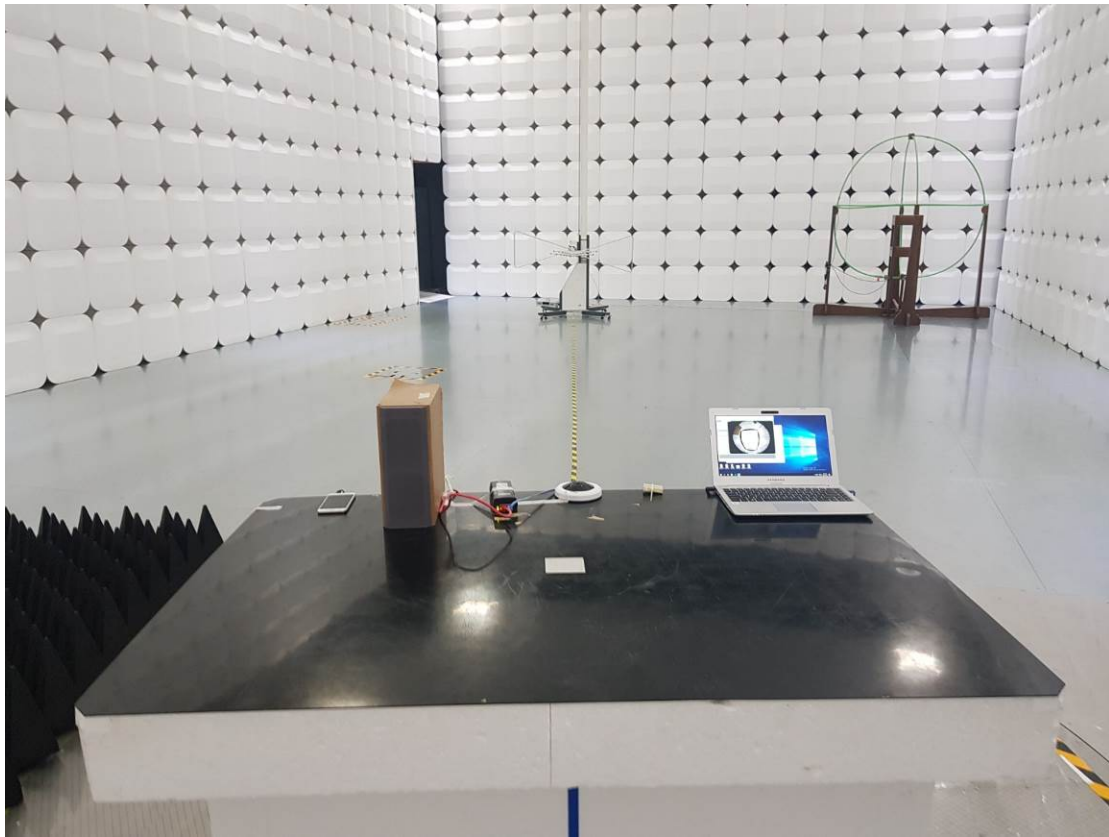

Radiated emission (Maximum emission configuration) – Above 1GHz / Capture mode (Adapter)

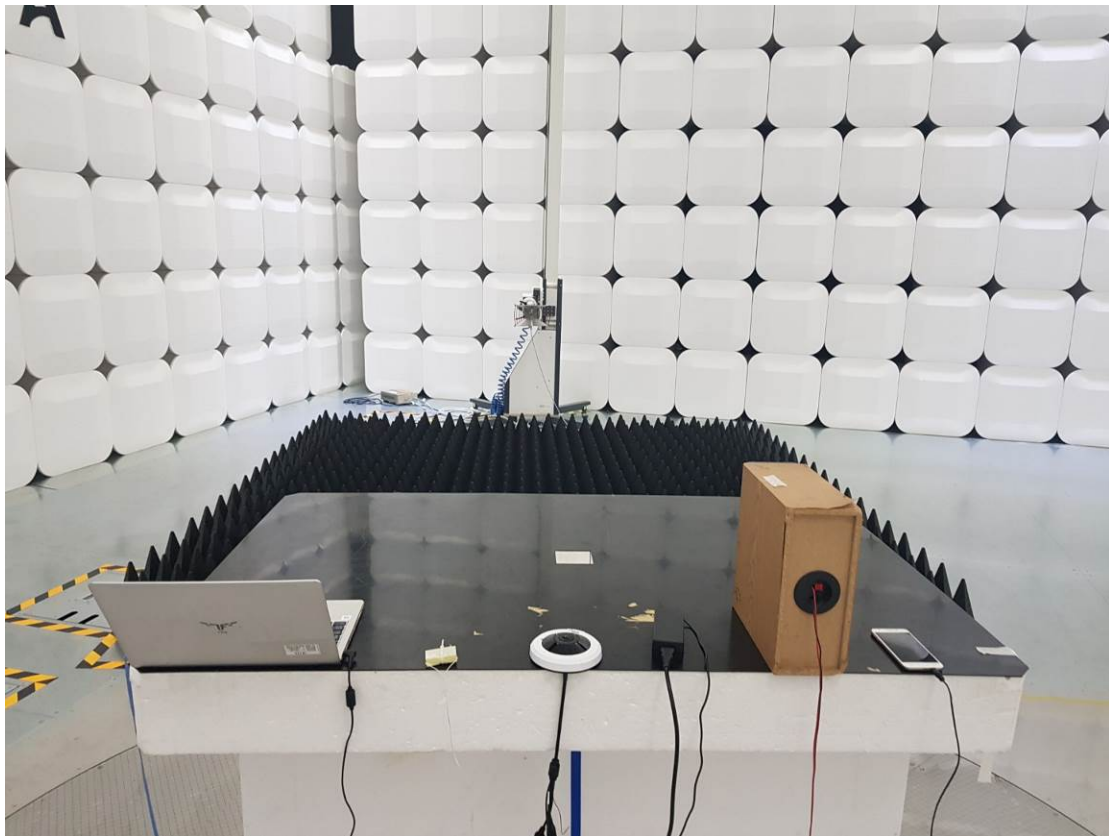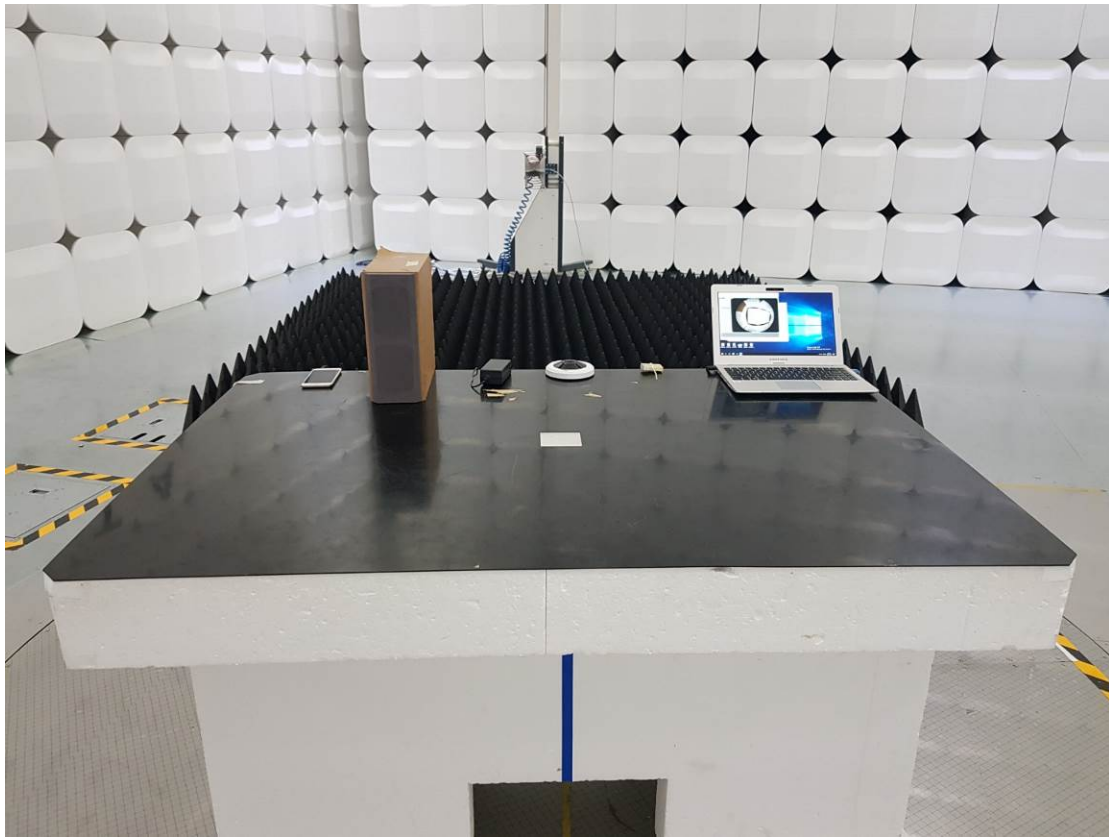

Radiated emission (Maximum emission configuration) – Above 1GHz / Capture mode (PoE)

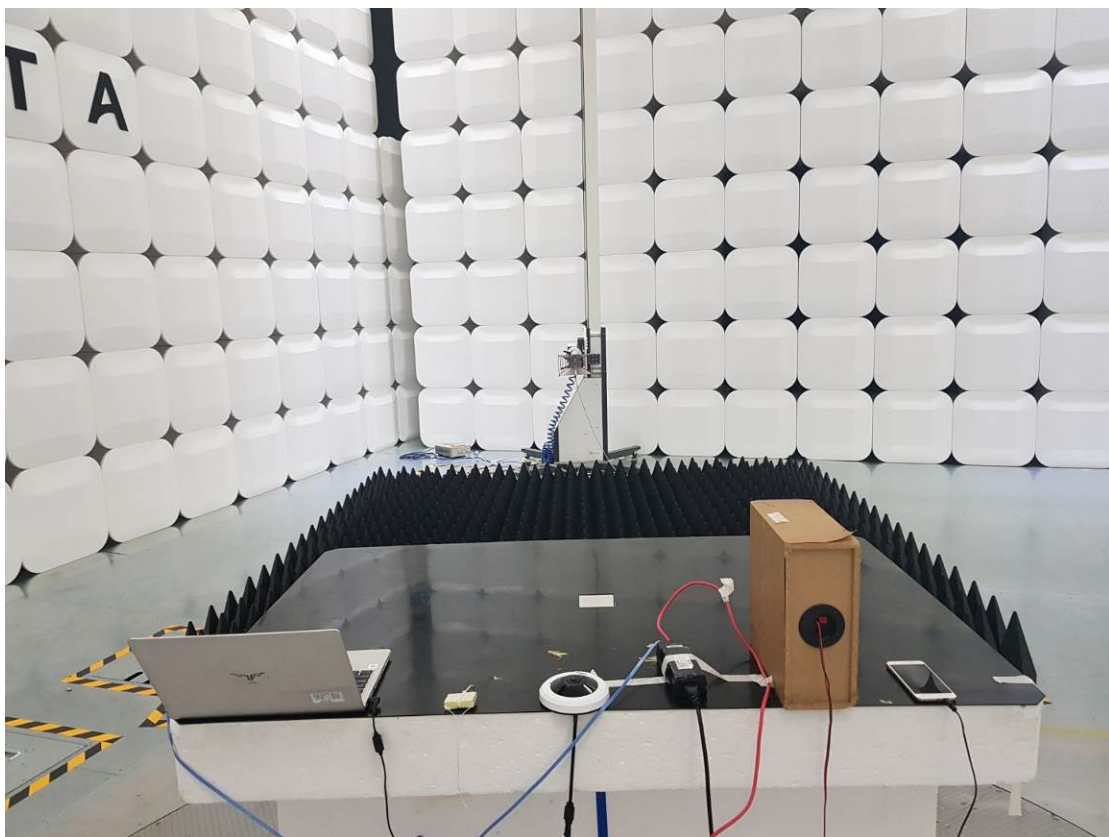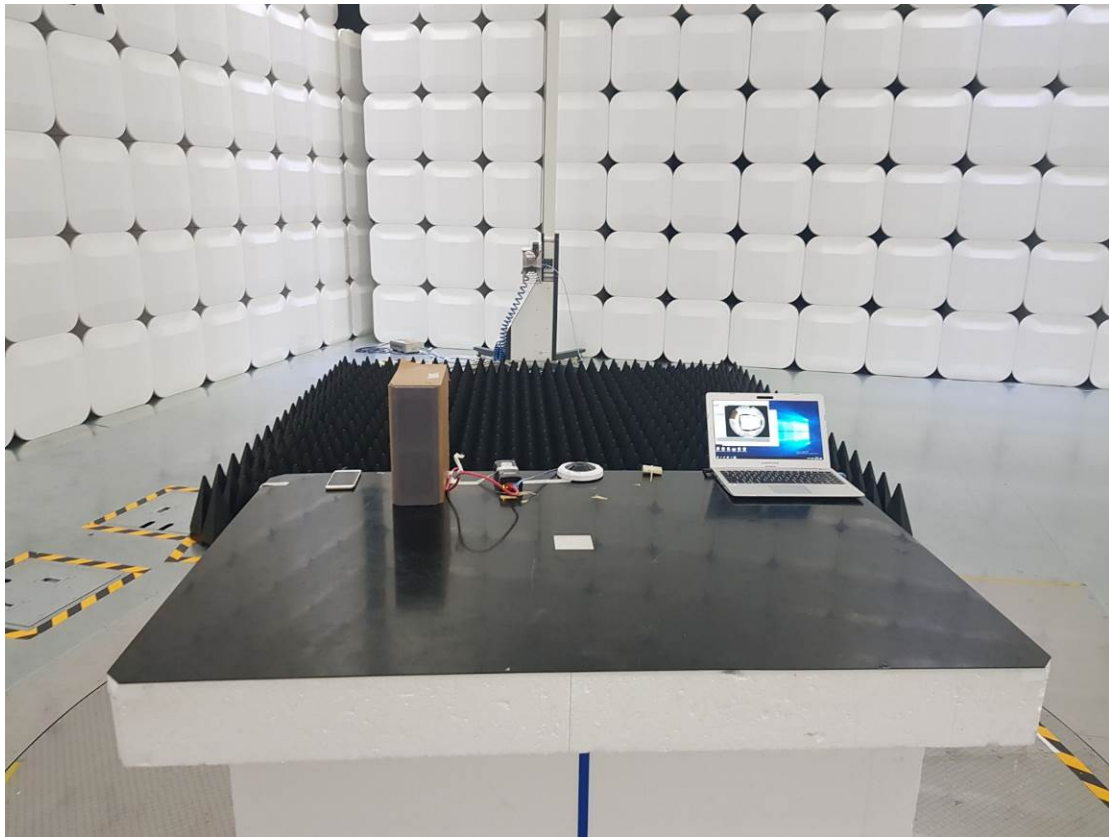

Harmonic Current / Capture mode (Adapter)



Voltage Variation and Flicking / Capture mode (Adapter)




Electrostatic discharge / Capture mode (Adapter)




Electrostatic discharge / Capture mode (PoE)



RF Electromagnetic Field / Capture mode (Adapter)

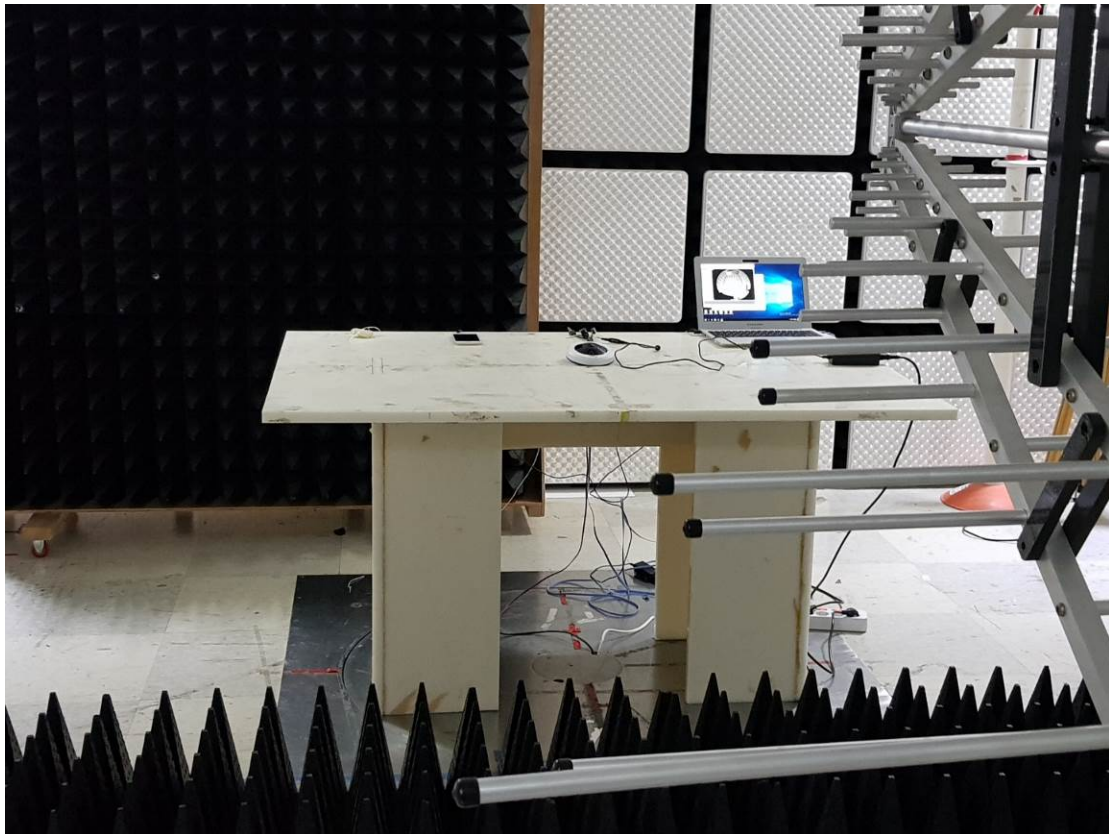

RF Electromagnetic Field / Capture mode (PoE)

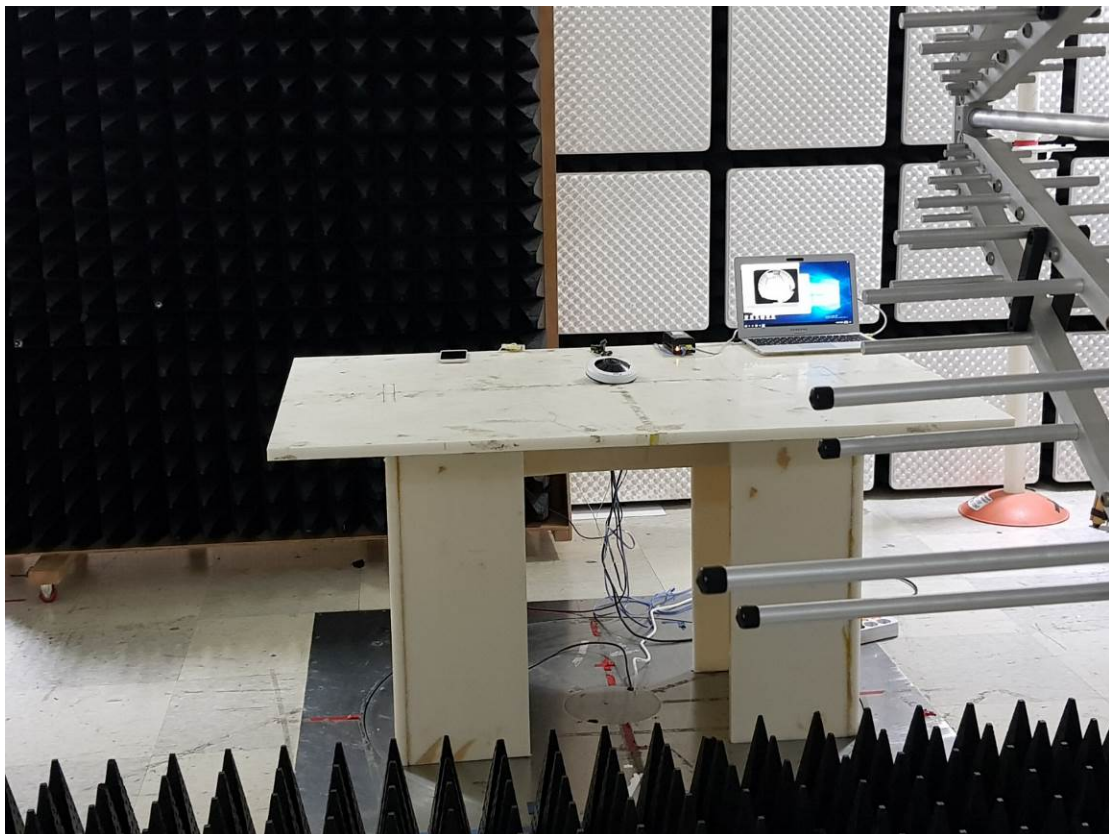

Electrical fast transients / Capture mode (Adapter)




Electrical fast transients / Capture mode (PoE)




Surge / Capture mode (Adapter)




Surge / Capture mode (PoE)

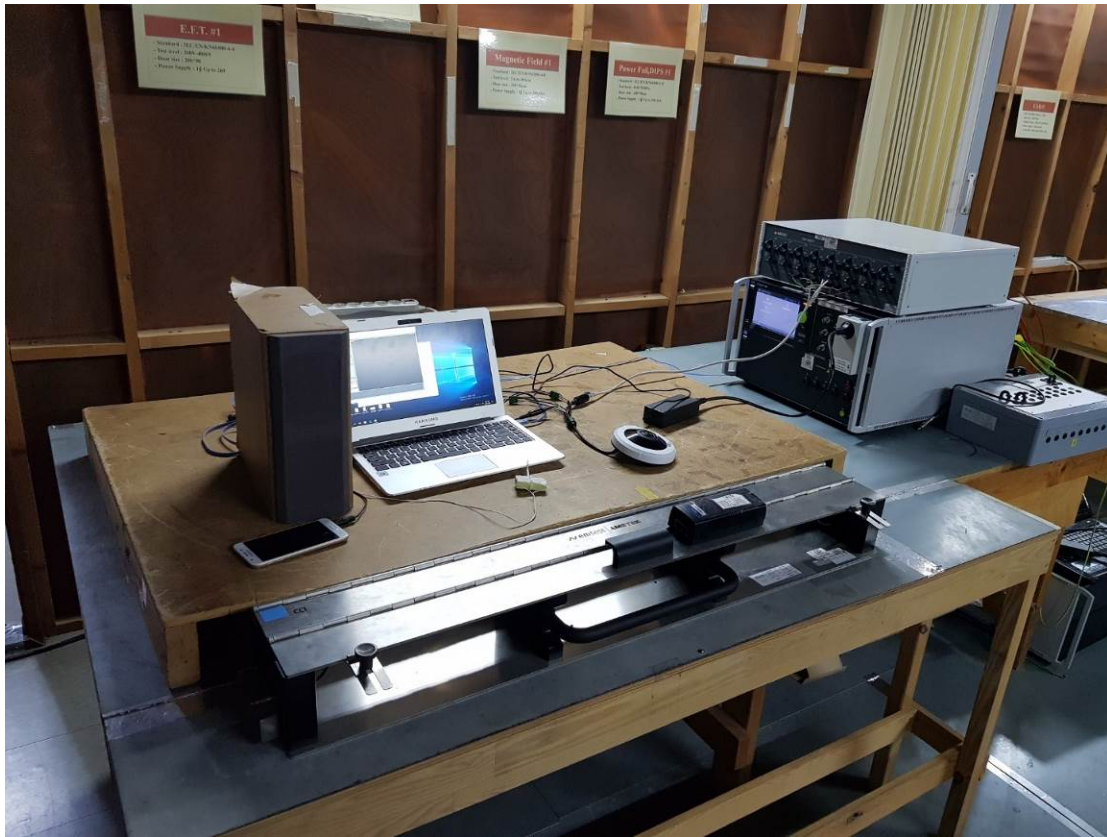


Conducted Disturbances, Induced by Radio-Frequency Fields / Capture mode (Adapter)

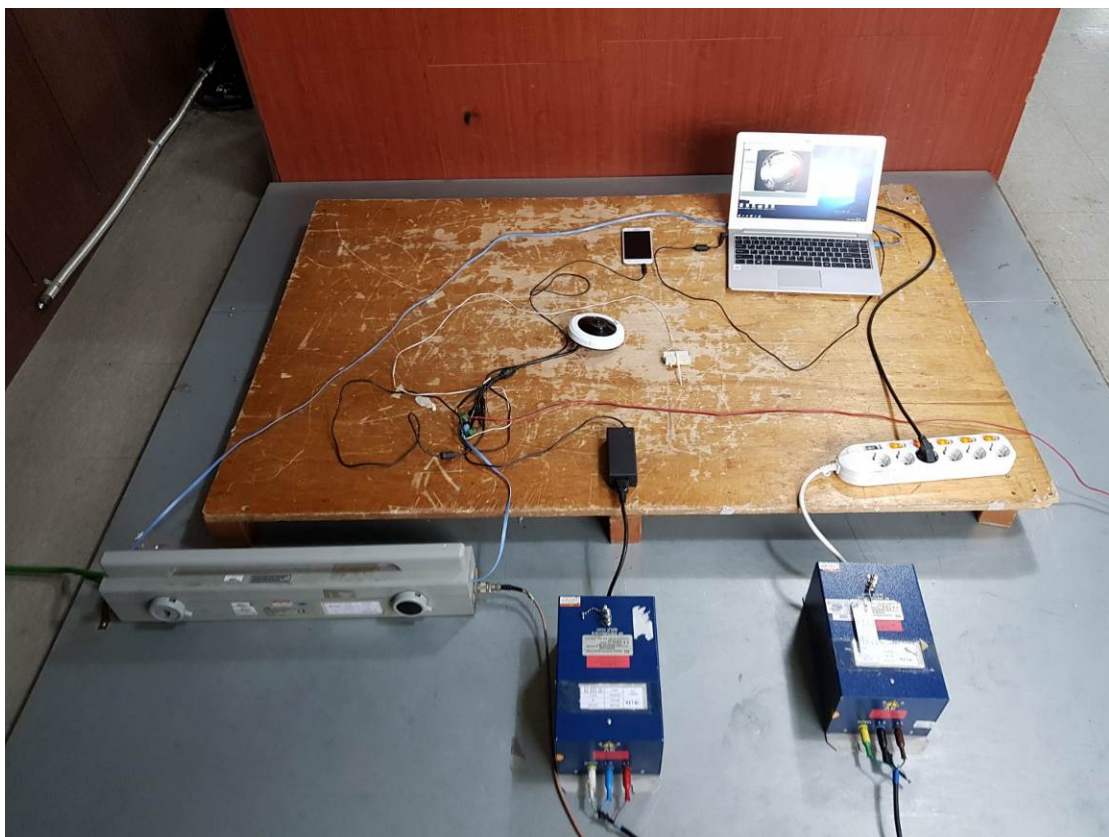

Conducted Disturbances, Induced by Radio-Frequency Fields / Capture mode (PoE)

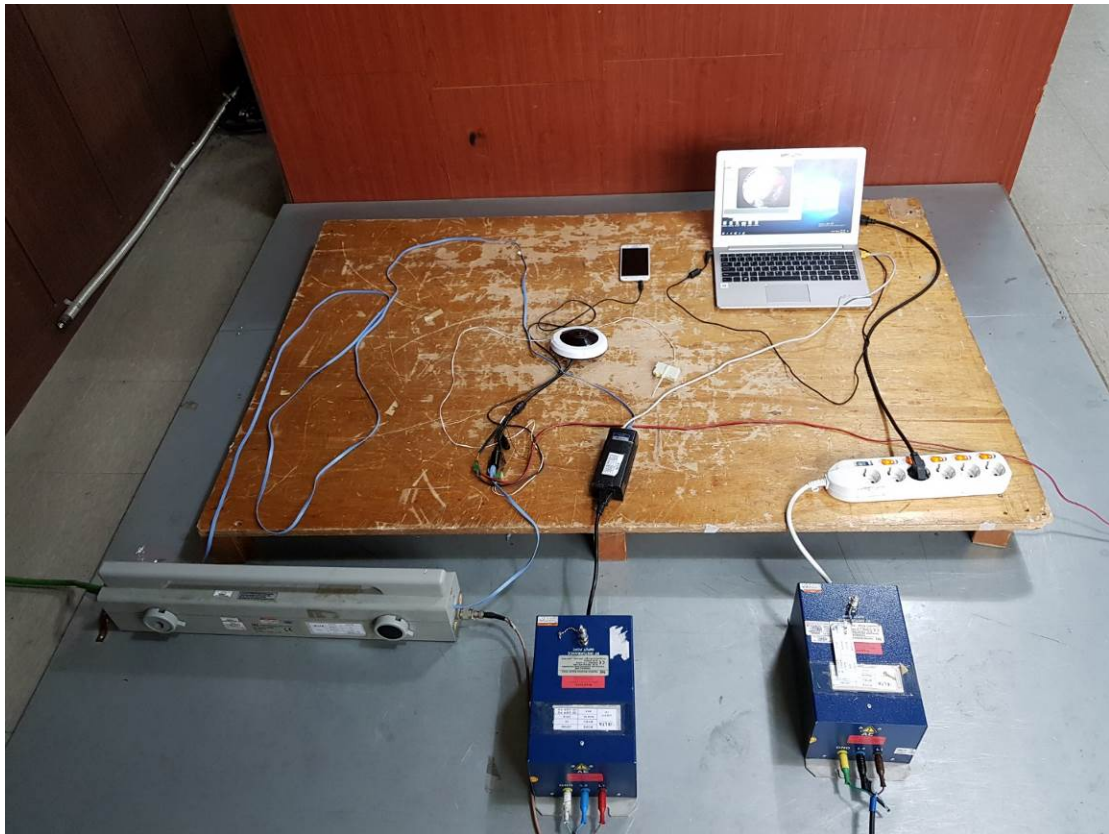

Main supply voltage dips, short interruptions / Capture mode (Adapter)

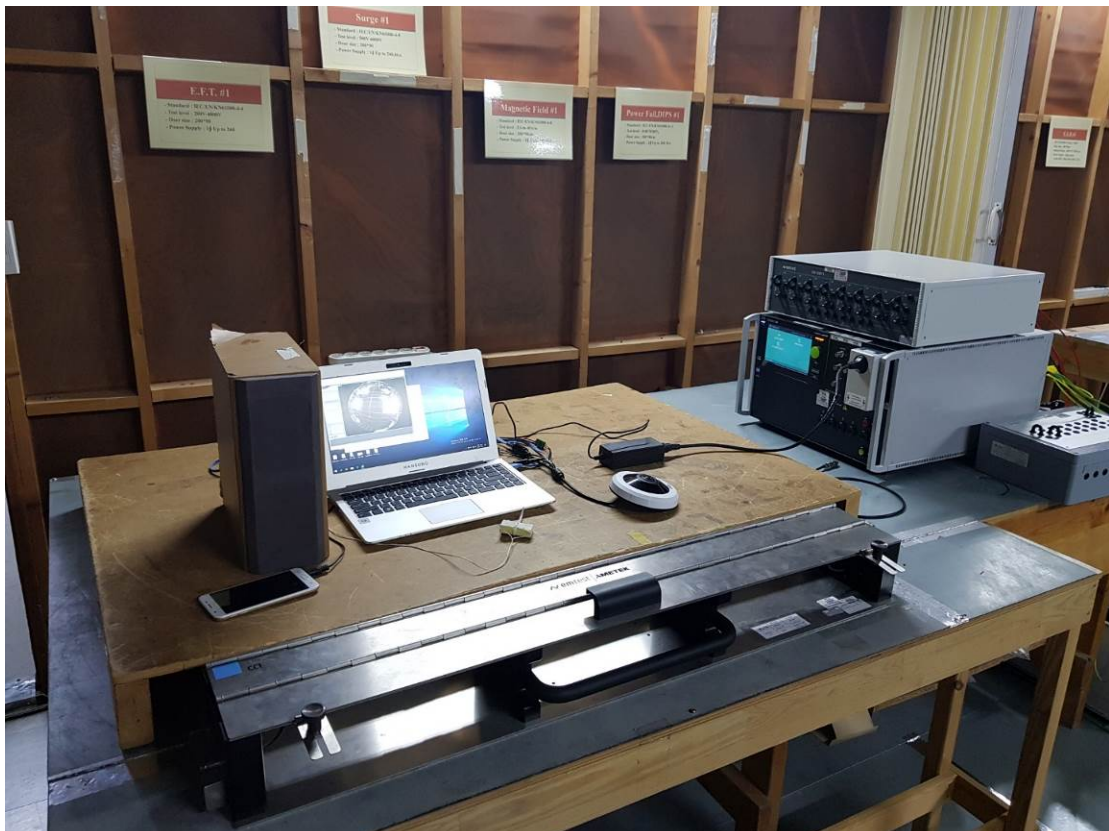

EUT



EUT

