

EMC TEST REPORT

Dates of Tests: June 28 – July 03, 2018
Test Report S/N: LR500121807F
Test Site : LTA Co., Ltd.

Model No.

DR-1308P

APPLICANT

IDIS CO., LTD.

Equipment Name : Network Video Recorder
Manufacturer : IDIS CO., LTD.
Model name : DR-1308P
Additional Model name : NR-1308P
Test Device Serial No.: Identification
Directive : Electromagnetic Compatibility Directive 2014/30/EU
Rule Part(s) : EN 55032:2015
EN 50130-4:2011/A1:2014+A1:2014
EN 61000-3-2:2014
EN 61000-3-3:2013
Data of reissue : July 06, 2018

This test report is issued under the authority of:

The test was supervised by:



Young Kyu Shin, Technical Manager



Young Ho, Bang, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB CODE 200723-0

Revision	Date of issue	Test report No.	Description
0	06.07.2018	LR500121807F	Initial

TABLE OF CONTENTS

1. General information's	4
2. Information's about test item	5
3. Test Report	7
3.1 Summary of tests	7
3.2 EMISSION	8
3.2.1 Conducted emissions	8
3.2.2 Radiated Emission	14
3.2.3 Harmonic Current (AC power input port)	20
3.2.4 Voltage Variation and Flicking (AC power input port).....	22
3.3 IMMUNITY	25
3.3.1 Electrostatic Discharge	25
3.3.2 RF Electromagnetic Field	27
3.3.3 Electrical fast transients	28
3.3.4 Surge	29
3.3.5 Conducted disturbances, induced by radio-frequency fields	30
3.3.6 Mains supply voltage dips, short interruptions	31
3.3.7 Mains supply voltage variations	32
APPENDIX A TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....	33
APPENDIX B PERFORMANCE CRITERIA	37
APPENDIX C PHOTOGRAPHS	40

1. General information's

1-1 Test Performed

Company name : **LTA Co., Ltd.**
 Address : 243, Jubug-ri, Yangji-Myeon, Yongin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2018-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2019-04-13	FCC CAB
VCCI	JAPAN	C-4948,	2020-09-10	VCCI registration
		T-2416,	2020-09-10	
		R-4483(10 m),	2020-10-15	
		G-847	2018-12-13	
IC	CANADA	5799A-2	2019-03-15	IC filing
KOLAS	KOREA	NO.551	2021-08-20	KOLAS accredited Lab.

2. Information's about test item

2-1 Client/ Manufacturer

Company name : IDIS CO., LTD.
 Address : 8-10, TECHNO 3-RO, YUSEONG-GU, DAEJEON, KOREA
 Telephone / Facsimile : +82-31-723-5205 / +82-31-723-5108

Factory 1

Company name : IDIS CO., LTD.
 Address : 8-10, TECHNO 3-RO, YUSEONG-GU, DAEJEON, KOREA

2-2 Equipment Under Test (EUT)

Class : A
 Equipment Name : Network Video Recorder
 Model name : DR-1308P
 Additional Model name : NR-1308P
 DR-1308P is basic model, which was tested.
 NR-1308P is identical to DR-1308P except for Model Name, marketing purpose.
 Serial number : Identification
 Date of receipt : June 12, 2018
 EUT condition : Pre-production, not damaged
 Interface ports : DC IN, USB 2.0 #1, USB 2.0 #2, HDMI, VGA, LAN, PoE LAN
 Power rating : DC 56 V, 1.28 A
 Modulator : -
 Crystal/Oscillator(s) : -
 Firmware version : XXXX

2-3 Modification

-NONE

2-4 Model Specification

-NONE

2-5 Test conditions

Temp. / Humid. / Pressure : +(23 - 25) °C / (49 - 50) % R.H. / (100.1) kPa
 Tested Model : DR-1308P
 Test mode : Rec mode
 Power supply : AC 230 V, 50 Hz

2-5 EUT

Equipment	Model No.	Serial No.	Manufacturer
Network Video Recorder	DR-1308P	N/A	IDIS CO., LTD.

2-6 Accessary

Equipment	Model No.	Serial No.	Manufacturer
Notebook	P56	N/A	HANSUNG
Monitor #1	P2416D	N/A	DELL
Monitor #2	P2317H	N/A	DELL
Camera	N/A	N/A	IDIS CO., LTD.
Keyboard	SK-8115	N/A	DELL
Mouse	1484	N/A	Micro Soft

2-7 Cable List

From		To		Length (m)	Shielding	
Type	I/O Port	Type	I/O Port		Cable	backshell
EUT	DC IN	Adapter	DC OUT	2.0	NO	Plastic
	USB 2.0	Keyboard	USB	1.0	NO	Plastic
	USB 2.0	Mouse	USB	1.0	NO	Plastic
	LAN	Notebook	LAN	3.0	NO	Plastic
	HDMI	Monitor #1	HDMI	1.5	NO	Plastic
	VGA	Monitor #2	VGA	1.5	NO	Plastic
	PoE LAN	Camera	LAN	3.0	NO	Plastic
Notebook	DC IN	Adapter	DC OUT	2.0	NO	Plastic
Monitor #1	AC IN	AC Power Source	3 Pin AC Line	1.5	NO	Plastic
Monitor #2	AC IN	AC Power Source	3 Pin AC Line	1.5	NO	Plastic

3. Test Report

3.1 Summary of tests

Parameter	Applied Standard	Status
I. Emission		
Radiated Emission	EN 55032:2015	C
Conducted Emission	EN 55032:2015	C
Harmonic Current Emission	EN 61000-3-2:2014	NA ^{Note 3}
Voltage Fluctuations and Flicker	EN 61000-3-3:2013	C
II. Immunity		
Electrostatic Discharge	EN 61000-4-2:2009	C
RF Electromagnetic field	EN 61000-4-3:2006/A1:2008/A2:2010	C
Fast Transients Common mode	EN 61000-4-4:2012	C
Surges, line to line and line to ground	EN 61000-4-5:2014	C
RF common mode	EN 61000-4-6:2014/AC:2015	C
Voltage dips and Interruptions	EN 61000-4-11:2004/A1:2017	C
Main supply voltage variations	EN 50130-4:2011/A1:2014	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 3: We did not test EN61000-3-2 (Harmonic current emissions) for the DR-1308P because equipment whose rated power is less or equal 75W don't need to be tested.

3.2 EMISSION

3.2.1 Conducted emissions

Definition:

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power In/Output ports.

We were performed the test according to LTA procedure LTA-QI-04.

Measurement Frequency range	: 150 kHz – 30 MHz
Test method	: EN 55032:2015
Measurement RBW	: 9 kHz
Test mode	: Rec mode
Result	: Complies

Measurement Data:

- Refer to the Next page (Maximum emission configuration)

A sample calculation:

COR. F (correction factor)= LISN Insertion loss + Cable loss + Pulse Limiter Factors

Emission Level= meter reading + COR.F

Limits for conducted disturbance at the mains ports of class A ITE

Frequency Range	Quasi-peak	Average
(0.15 – 0.5) MHz	79 dBuV	66 dBuV
(0.5 – 30) MHz	73 dBuV	60 dBuV

Note: The limits will decrease with the frequency logarithmically within 0.15MHz to 0.5MHz

Limits for conducted disturbance at the mains ports of class B ITE

Frequency Range	Quasi-peak	Average
(0.15 – 0.5) MHz	(66 – 56) dBuV	(56 - 46) dBuV
(0.5 – 5) MHz	56 dBuV	46 dBuV
(5 – 30) MHz	60 dBuV	50 dBuV

Note: The limits will decrease with the frequency logarithmically within 0.15 MHz to 0.5 MHz

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class A equipment

Frequency Range	Voltage limits		Current limits	
	Quasi-peak	Average	Quasi-peak	Average
(0.15 – 0.5) MHz	(97 – 87) dBuV	(84 – 74) dBuV	(53 – 43) dBuV	(40 – 30) dBuV
(0.5 – 30) MHz	87 dBuV	74 dBuV	43 dBuV	30 dBuV

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class B equipment

Frequency Range	Voltage limits		Current limits	
	Quasi-peak	Average	Quasi-peak	Average
(0.15 – 0.5) MHz	(84 – 74) dBuV	(74 – 64) dBuV	(40 – 30) dBuV	(30 – 20) dBuV
(0.5 – 30) MHz	74 dBuV	64 dBuV	30 dBuV	20 dBuV

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Conducted emissions (LINE)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : DR-1308P

Phase : LINE

Test Mode : Rec mode

Test Power : 230 / 50


Temp. / Humi. : 25 / 50

Test Engineer : BANG Y H

Data: 1118

File: D:\Conducted Data\2018\LTA_Conduction_2018_6-1.EM6 (1118)

Date: 2018-06-28

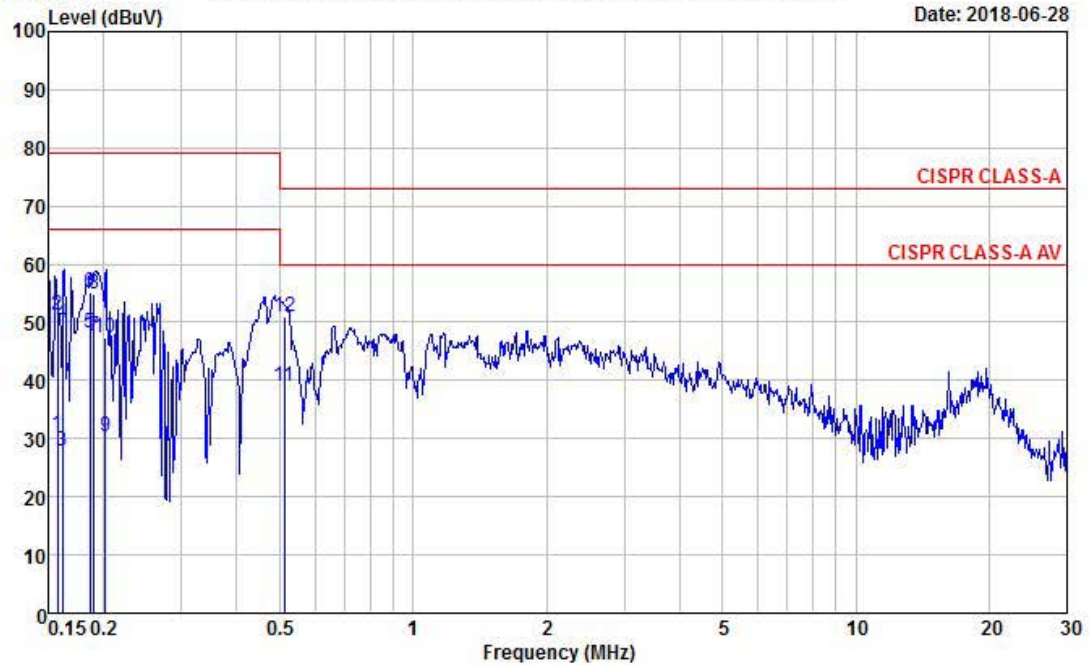

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.157	31.68	11.10	19.44	51.12	30.54	79.00	66.00	27.88	35.46
0.162	30.48	8.43	19.44	49.92	27.87	79.00	66.00	29.08	38.13
0.186	35.70	28.80	19.44	55.14	48.24	79.00	66.00	23.86	17.76
0.190	35.52	28.26	19.44	54.96	47.70	79.00	66.00	24.04	18.30
0.201	27.97	10.81	19.44	47.41	30.25	79.00	66.00	31.59	35.75
0.513	31.51	19.52	19.44	50.95	38.96	73.00	60.00	22.05	21.04

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (NEUTRAL)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : DR-1308P

Phase : NEUTRAL

Test Mode : Rec mode

Test Power : 230 / 50


Temp. / Humi. : 25 / 50

Test Engineer : BANG Y H

Data: 1119

File: D:\Conducted Data\2018\LTA_Conduction_2018_6-1.EM6 (1119)

Date: 2018-06-28

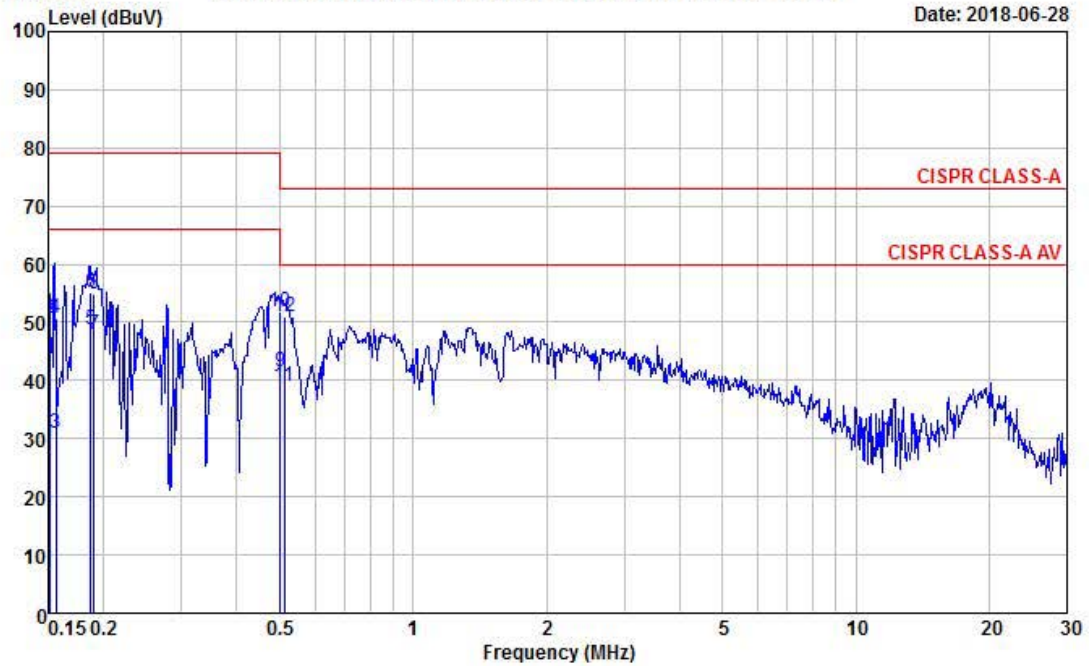

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.151	31.34	10.06	19.42	50.76	29.48	79.00	66.00	28.24	36.52
0.156	31.41	11.45	19.42	50.83	30.87	79.00	66.00	28.17	35.13
0.187	35.77	29.38	19.41	55.18	48.79	79.00	66.00	23.82	17.21
0.191	35.58	28.59	19.41	54.99	48.00	79.00	66.00	24.01	18.00
0.502	32.49	21.98	19.42	51.91	41.40	73.00	60.00	21.09	18.60
0.512	31.66	19.66	19.42	51.08	39.08	73.00	60.00	21.92	20.92

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (TEL_10 M)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : DR-1308P

Phase : TEL_10M

Test Mode : Rec mode

Test Power : 230 / 50


Temp. / Humi. : 25 / 50

Test Engineer : BANG Y H

Data: 1116

File: D:\Conducted Data\2018\LTA_Conduction_2018_6-1.EM6 (1116)

Date: 2018-06-28

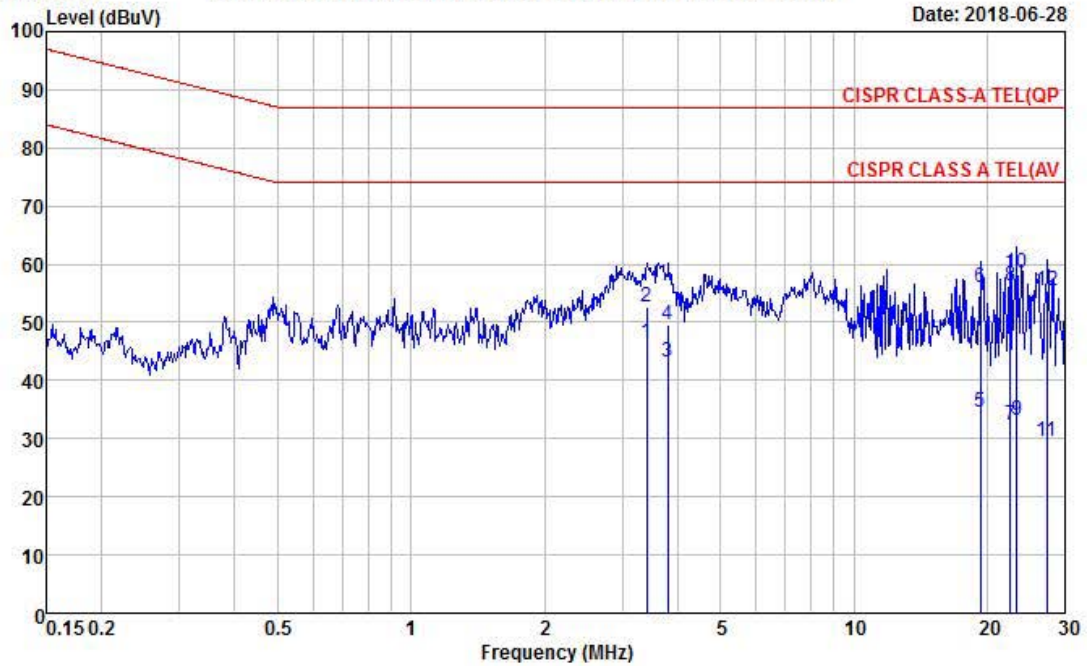

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
3.406	33.26	27.28	19.36	52.62	46.64	87.00	74.00	34.38	27.36
3.795	30.28	23.89	19.37	49.65	43.26	87.00	74.00	37.35	30.74
19.358	36.00	14.60	19.85	55.85	34.45	87.00	74.00	31.15	39.55
22.534	36.42	12.29	19.93	56.35	32.22	87.00	74.00	30.65	41.78
23.328	38.57	13.22	19.94	58.51	33.16	87.00	74.00	28.49	40.84
27.297	35.30	9.37	20.08	55.38	29.45	87.00	74.00	31.62	44.55

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (TEL_100 M)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : DR-1308P

Phase : TEL_100M

Test Mode : Rec mode

Test Power : 230 / 50


Temp. / Humi. : 25 / 50

Test Engineer : BANG Y H

Data: 1117

File: D:\Conducted Data\2018\LTA_Conduction_2018_6-1.EM6 (1117)

Date: 2018-06-28

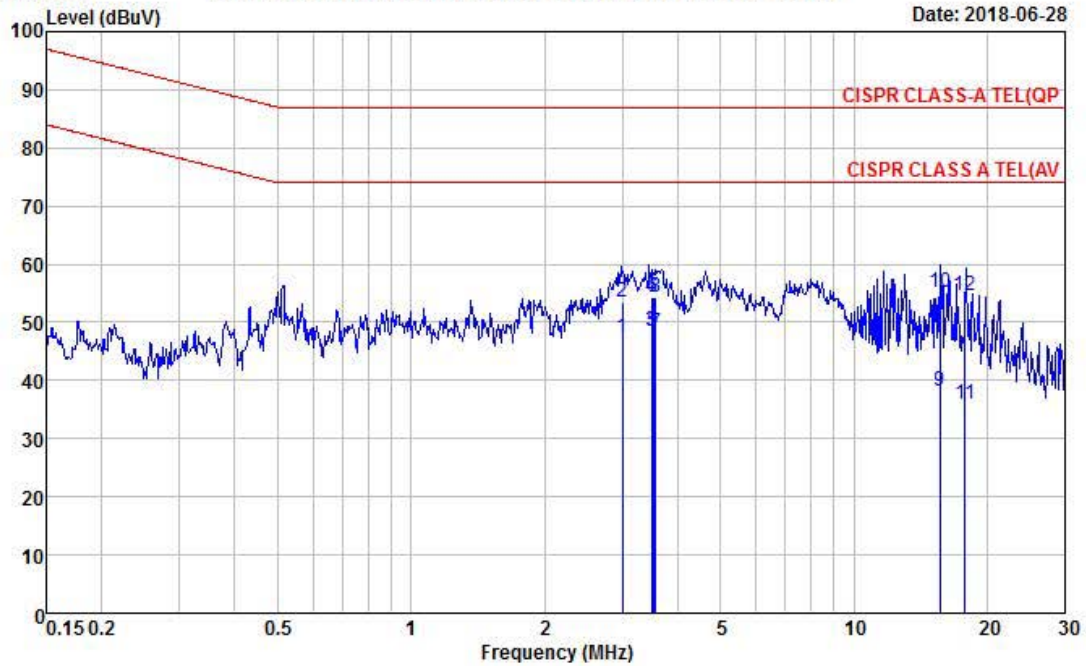

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
3.001	34.25	28.08	19.24	53.49	47.32	87.00	74.00	33.51	26.68
3.488	34.99	29.31	19.24	54.23	48.55	87.00	74.00	32.77	25.45
3.525	35.02	29.29	19.24	54.26	48.53	87.00	74.00	32.74	25.47
3.572	35.03	28.99	19.24	54.27	48.23	87.00	74.00	32.73	25.77
15.633	35.57	18.54	19.57	55.14	38.11	87.00	74.00	31.86	35.89
17.831	35.06	16.24	19.63	54.69	35.87	87.00	74.00	32.31	38.13

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

3.2.2 Radiated Emission

Definition:

The test assesses the ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

We were performed the test according to LTA procedure LTA-QI-04.

Test method	: EN 55032:2015
Measuring Distance	: 10 m for below 1 GHz / 3 m for above 1 GHz
Measurement Frequency range	: 30 MHz – 6 000 MHz
Measurement RBW	: 120 kHz @ 10 m / 1 MHz @ 3 m
Test mode	: Rec mode
Result	: Complies

Measurement Data:

- Refer to the Next page (Maximum emission configuration)

- The highest internal source of an EUT is higher than 108 MHz, the measurement shall be made up to 6 GHz.

(The highest internal source of an EUT : 6 GHz)

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

Limit of 10 m for below 1 GHz

CLASS A

Frequency Range	Quasi-peak
(30 – 230) MHz	40 dBuV/m
(230 – 1 000) MHz	47 dBuV/m

CLASS B

Frequency Range	Quasi-peak
(30 – 230) MHz	30 dBuV/m
(230 – 1 000) MHz	37 dBuV/m

Limit of 3m for above 1 GHz

CLASS A

Frequency Range	Average Limit @ 3m (dB μ V/m)	Peak limit @ 3m (dB μ V/m)
(1 000 – 3 000) MHz	56	76
(3 000 – 6 000) MHz	60	80
NOTE:	The lower limit applies at the transition frequency.	

CLASS B

Frequency Range	Average Limit @ 3m (dB μ V/m)	Peak limit @ 3m (dB μ V/m)
(1 000 – 3 000) MHz	50	70
(3 000 – 6 000) MHz	54	74
NOTE:	The lower limit applies at the transition frequency.	

Radiated Emission (Below 1 GHz) / V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: DR-1308P

Temp/Humi: 23 / 49


Test Mode : Rec mode

Tested by: BANG H Y

Data: 2810

File: C:\Program Files (x86)\e3\1806-1.EM6 (2810)

Date: 2018-06-29

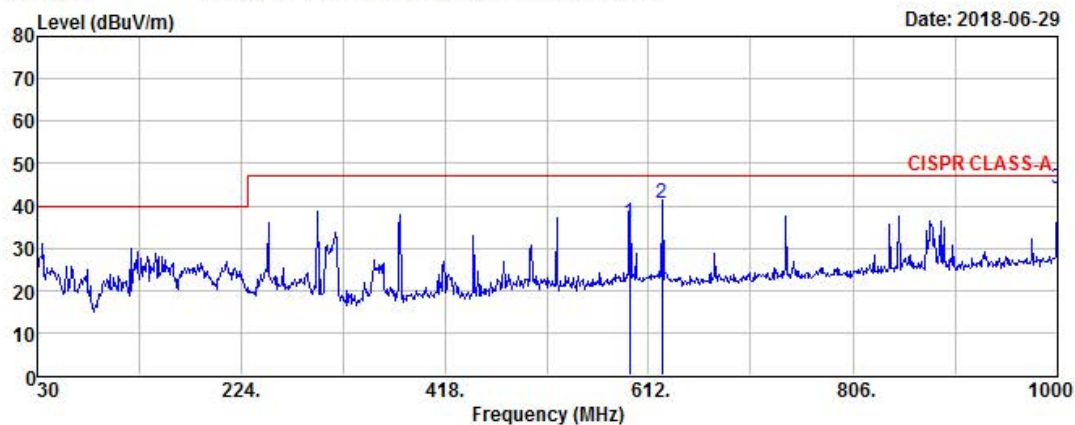

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
594.00	45.00	-8.91	36.09	47.00	10.91	100	181	VERTICAL
625.02	48.69	-8.29	40.40	47.00	6.60	106	301	VERTICAL
1000.00	44.60	-0.76	43.84	47.00	3.16	395	200	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / H



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: DR-1308P

Temp/Humi: 23 / 49


Test Mode : Rec mode

Tested by: BANG H Y

Data: 2809

File: C:\Program Files (x86)\e3\1806-1.EM6 (2809)

Date: 2018-06-29

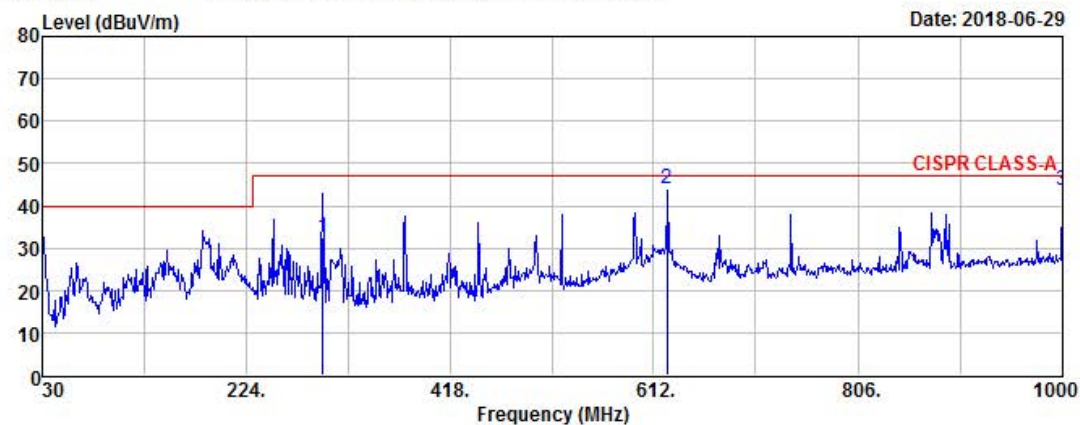

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
297.05	48.19	-15.53	32.66	47.00	14.34	353	224	HORIZONTAL
625.01	52.29	-8.29	44.00	47.00	3.00	150	297	HORIZONTAL
1000.00	44.50	-0.76	43.74	47.00	3.26	100	152	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Above 1 GHz)

EUT/Model No.: DR-1308P

Temp/Humi: 23 / 49


Test Mode : Rec mode

Tested by: BANG H Y

Data: 2812

File: C:\Program Files (x86)\e3\1806-1.EM6 (2812)

Date: 2018-06-29

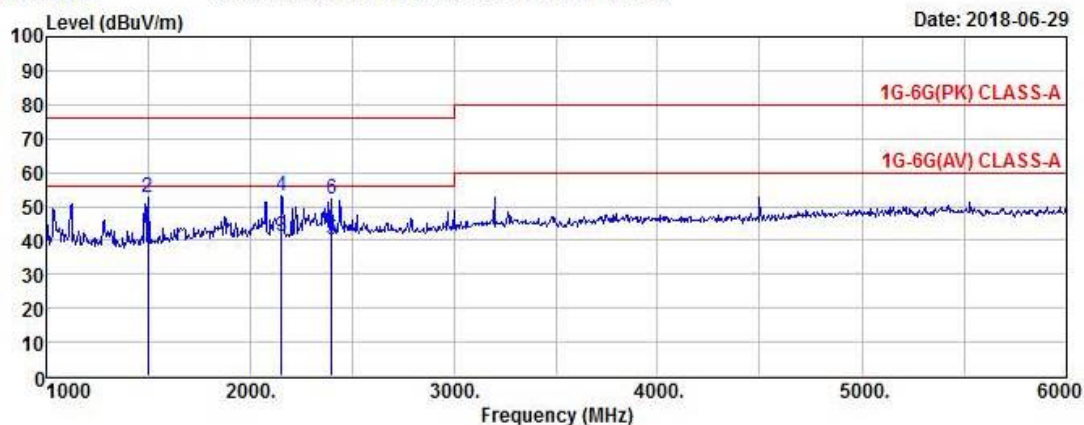

EUT/Model No.: DR-1308P

Temp/Humi: 23 / 49


Test Mode : Rec mode

Tested by: BANG H Y

Data: 2811

File: C:\Program Files (x86)\e3\1806-1.EM6 (2811)

Date: 2018-06-29

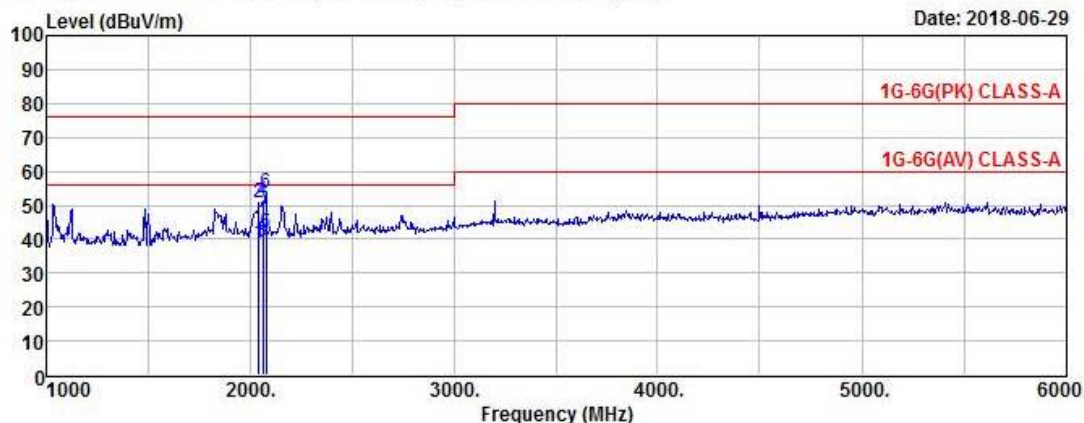

Manufacture : IDIS CO., LTD.

Test Date

Temp.: Humidity Distance

[°C] : [%] (m)

2018-06-29

23

49

3.7

Model : DR-1308P

TEST mode : REC mode

Ver Data: 2812

Hor Data: 2811

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
2045.0	50.4	38.4	2.12	52.49	40.49	76.0	56.0	23.51	15.51	100	126	H
2065.0	50.8	38.8	2.23	53.01	41.01	76.0	56.0	22.99	14.99	100	254	H
2080.0	53.2	41.2	2.31	55.54	43.54	76.0	56.0	20.46	12.46	100	167	H
1796.0	56.9	44.9	-2.42	54.47	42.47	76.0	56.0	21.53	13.53	100	265	V
1996.0	52.3	40.3	2.58	54.86	42.86	76.0	56.0	21.14	13.14	100	196	V
2400.0	50.2	38.2	3.78	54.02	42.02	76.0	56.0	21.98	13.98	100	136	V

Manufacture : IDIS CO., LTD.

Test Date

Temp.: Humidity Distance

[°C]

: [%]

(m)

Model : DR-1308P

2018-06-29

23

49

4.5

TEST mode : REC mode

Ver Data: 2812

Hor Data: 2811

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
2045.0	52.1	40.1	2.12	54.19	42.19	76.0	56.0	21.81	13.81	100	126	H
2065.0	52.5	40.5	2.23	54.71	42.71	76.0	56.0	21.29	13.29	100	254	H
2080.0	54.9	42.9	2.31	57.24	45.24	76.0	56.0	18.76	10.76	100	167	H
1796.0	58.6	46.6	-2.42	56.17	44.17	76.0	56.0	19.83	11.83	100	265	V
1996.0	54.0	42.0	2.58	56.56	44.56	76.0	56.0	19.44	11.44	100	196	V
2400.0	51.9	39.9	3.78	55.72	43.72	76.0	56.0	20.28	12.28	100	136	V

3.2.3 Harmonic Current (AC power input port)

Definition:

This part deals with the Limitation of harmonic currents injected into the public supply system.



We were performed the test according to LTA procedure LTA-QI-04.

Test method	: EN 61000-3-2:2014
Test mode	: Rec mode
Rated power	: 16.835 W
Result	: Not Applicable

Measurement Data:

- We did not test EN61000-3-2 (Harmonic current emissions) for the DR-1308P because equipment whose rated power is less or equal 75W don't need to be tested.

Harmonic Current (AC power input port)

03rd July 2018 - 20:57:51		Page 1/1	IECSoft v2_5a
 BSEN61000-3-2:2014 Fluctuating Harmonics			
Instrument Details			
Instrument Model	PPA5511		
Serial Number	162-04957		
Firmware Version	2.168		
N4L Calibration Date	18th September 2017		
Instrument Version	Standard		
Test Settings			
Class	Class A		
Mode	Measured		
Equipment Under Test			
Brand	IDIS CO., LTD.		
Model	DR-1308P		
Serial	N/A		
Impedance Network ID	N/A		
Test Conditions			
	User Entered	Measured	
Rated Voltage	N/A	230.925V	
Rated Current	N/A	224.936mA	
Rated Frequency	N/A	50.000Hz	
Rated Power	N/A	16.835W	
Additional Test Information			
Measured Power Factor	0.324		
Max Current THD	275.19%		
Max THC	213.519mA		
Max Power	16.980W		
Max F.Current	79.275mA		
Average F.Current	78.109mA		
Minimum Current	100A		
Test Duration	2.5 minutes		
Additional Test Details			
Operator	N/A		
Lab Name	N/A		
Location	N/A		
Notes			
Signature			
Results	Test - N/A. Rated Power < 75W		

Test not applicable

With the exception of lighting equipment section 7 of the BSEN61000-3-2:2014 standard declares that no Harmonic current limits are specified for equipment with a rated power of

3.2.4 Voltage Variation and Flicking (AC power input port)

Definition:

This section is concerned with the limitation of voltage fluctuations and flicker impressed on the public low-voltage system.

We were performed the test according to LTA procedure LTA-QI-04.

Test method : EN 61000-3-3:2013


Test mode : Rec mode

Result : **Complies**

Measurement Data:

- Refer to the Next page

Voltage Variation and Flicking (AC power input port)

03rd July 2018 - 21:11:48		Page 1/2	IECSoft v2_5a
		IEC61000-3-3:2013 Ed.3.0 Flickermeter	
Instrument Details			
Instrument Model	PPA5511		
Serial Number	162-04957		
Firmware Version	2.168		
N4L Calibration Date	18th September 2017		
Instrument Version	Standard		
Test Settings			
Class	Voltage		
Mode	Normal (4%)		
Minimum Current	10A		
PST	10.00 minutes		
PLT	1 PSTs		
Equipment Under Test			
Brand	IDIS CO., LTD.		
Model	DR-1308P		
Serial	N/A		
Impedance Network ID	N/A		
Test Conditions			
	User Entered	Measured	
Rated Voltage	N/A	230.923V	
Rated Current	N/A	N/A	
Rated Frequency	N/A	50.000Hz	
Rated Power	N/A	N/A	
D max	0.0693% (Limit: 4.0%)		
T max	0.0000 s (Limit: 0.5 s)		
DC max	0.0009% (Limit: 3.3%)		
Additional Test Details			
Operator	N/A		
Lab Name	N/A		
Location	N/A		
Notes			
Signature			
Results	Phase1: PASS		

03rd July 2018 - 21:11:48			Ph:1 Page 2/2			IECSoft v2_5a		
IEC61000-3-3:2013 Ed.3.0 Flickermeter								
Instrument Details								
Instrument Model			PPA5511					
Instrument Serial			162-04957					
Instrument Firmware			2.168					
Equipment Under Test								
Brand			IDIS CO., LTD.					
Model			DR-1308P					
Serial			N/A					
Flicker Test Results								
PST no.	Status	DC (%)	Dmax (%)	Tmax (s)	PST	PST Lim	PLT	PLT Lim
1	Phase1: PASS	9E-04	0.0693	0	0.082	1.00	N/A	N/A

3.3 IMMUNITY

3.3.1 Electrostatic Discharge

Definition:

The test assesses the ability of the EUT to operate as intended in the event of an electrostatic discharge.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	: 2018.06.28.
Test method	: EN 61000-4-2 :2009
Temperature / Humidity / Pressure	: 24 °C / 49 % R.H. / 100.1 kPa
Discharge Impedance	: $(330 \pm 10\%) \Omega / (150 \pm 10\%) \text{ pF}$
Type of Discharge (air discharge)	: $\pm 2 \text{ kV}, \pm 4 \text{ kV}, \pm 8 \text{ kV}$
Type of Discharge (contact discharge)	: $\pm 6 \text{ kV}$
Number of discharges at each point	: 10 of each polarity
Discharge Repetition on Rate	: 1 / sec
Test mode	: Rec mode
Result	: Complies

Measurement Data:

- Refer to the Next page

1-1. Indirect Discharge



No.	Position	Kind of Discharge	Results	Remarks
1	HCP	Contact	Complies (A)	No reaction recognized
2	VCP	Contact	Complies (A)	No reaction recognized

1-2. Direct Discharge

No.	Position	Kind of Discharge	Result	Remarks
1	Enclosure #1	Air	Complies (A)	No reaction recognized
2	Enclosure #2	Contact	Complies (A)	No reaction recognized
3	Screw	Contact	Complies (A)	No reaction recognized
4	DC IN	Air	Complies (A)	No reaction recognized
5	LAN	Air	Complies (A)	No reaction recognized
6	VGA	Air	Complies (A)	No reaction recognized
7	HDMI	Air	Complies (A)	No reaction recognized
8	USB	Air	Complies (A)	No reaction recognized

ESD TEST POINT

- ← Air discharge
← Contact discharge

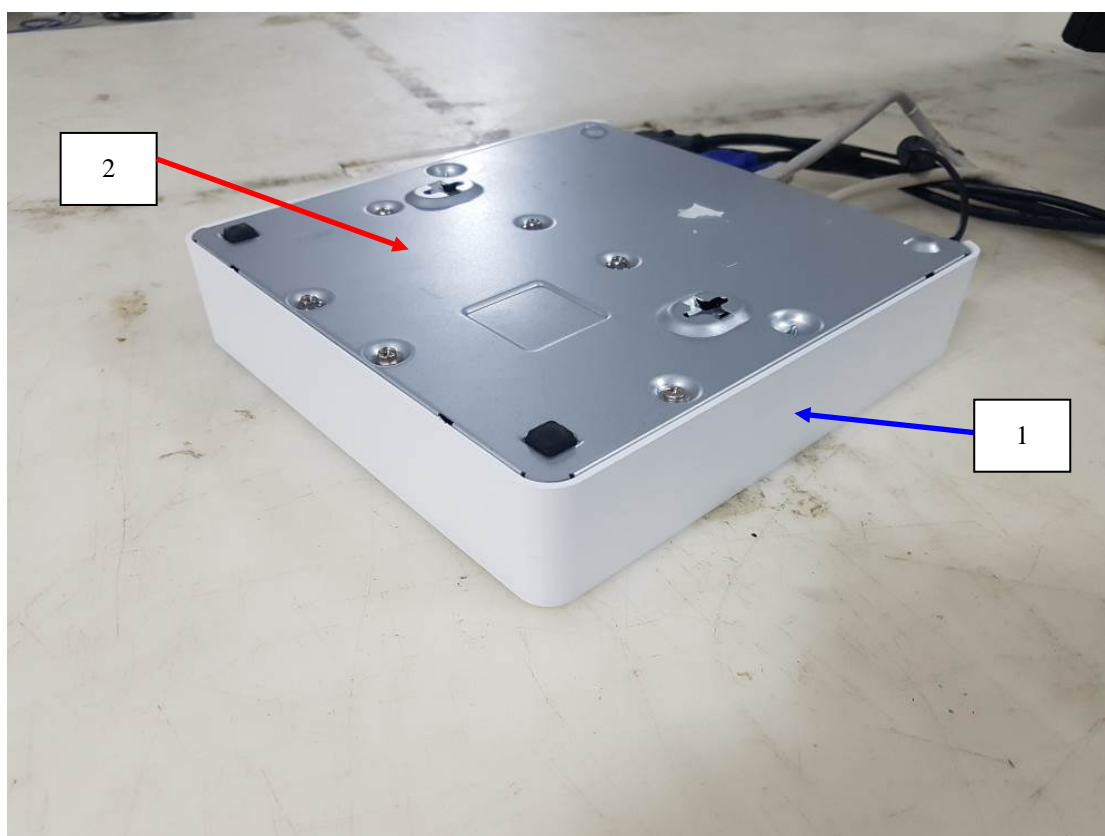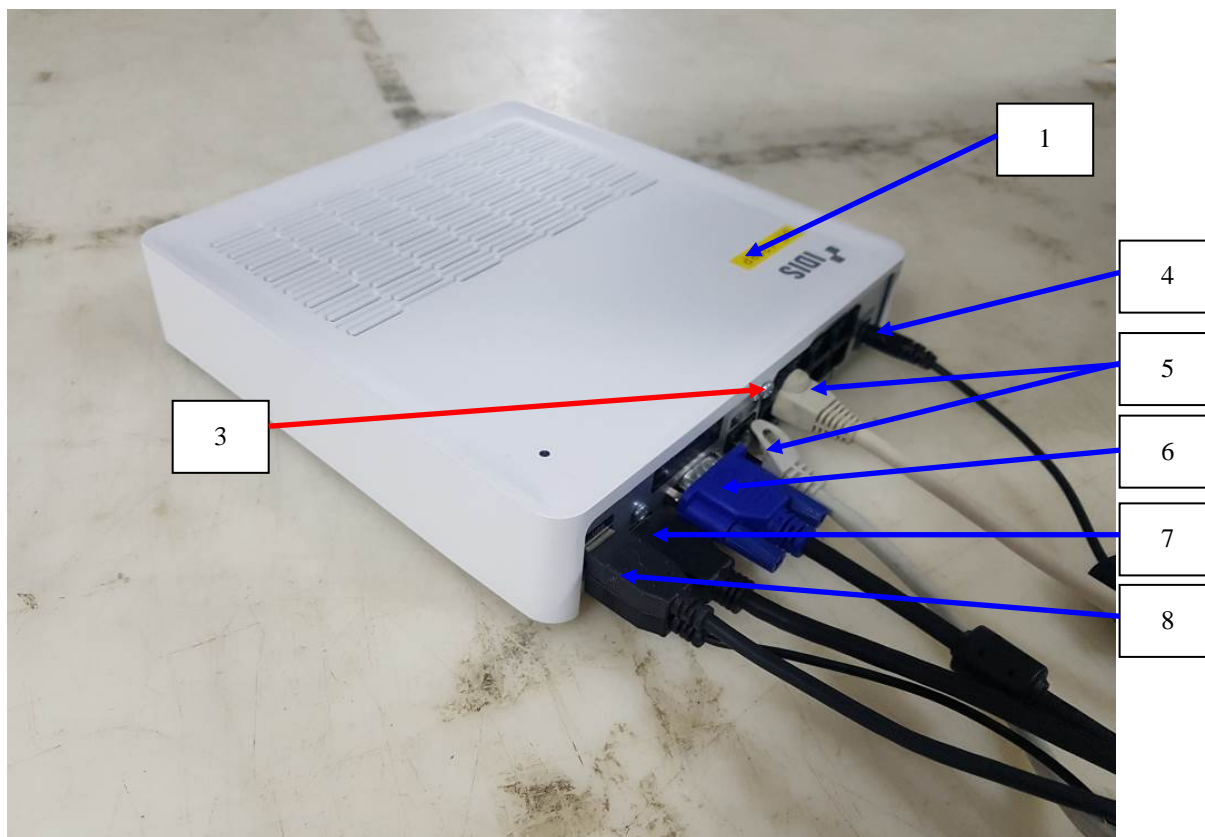

3.3.2 RF Electromagnetic Field

Definition:

The test assesses the ability of the EUT to operate as intended in the presence of a radio frequency electromagnetic field disturbance.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2018.07.03.
Test method	:	EN 61000-4-3:2006/A1:2008/A2:2010
Temperature / Humidity / Pressure	:	24 °C / 50 % R.H. / 100.1 kPa
Frequency range	:	80 MHz to 2,700 MHz
Test level	:	10 V/m (measured unmodulated)
Amplitude Modulation	:	AM, 80 %, 1 kHz Sinusoidal PM, 1 Hz (0.5s ON : 0.5s OFF)
Step size	:	1 % of fundamental
Dwell Time	:	3 s
Test mode	:	Rec mode
Result	:	Complies

Measurement Data:

Port	Side	Result	Remarks
Horizontal	Front	Complies (A)	No reaction recognized
	Left	Complies (A)	No reaction recognized
	Rear	Complies (A)	No reaction recognized
	Right	Complies (A)	No reaction recognized
Vertical	Front	Complies (A)	No reaction recognized
	Left	Complies (A)	No reaction recognized
	Rear	Complies (A)	No reaction recognized
	Right	Complies (A)	No reaction recognized

3.3.3 Electrical fast transients

Definition:

The test assesses the ability of the EUT to operate as intended in the event of fast transients presence on one of the input/output ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2018.06.28.
Test method	:	EN 61000-4-4:2012
Temperature / Humidity / Pressure	:	24 °C / 49 % R.H. / 100.1 kPa
Cable length	:	> 3 m
Test level	:	2.0 kV (AC power input port) 1.0 kV (Signal port)
Polarity	:	Negative/ positive
Repetition frequency	:	100 kHz
Test mode		Rec mode
Result	:	Complies

Measurement Data:

AC power Line	Test level	Result	Remarks
L – N	± 2 kV	Complies (A)	No reaction recognized

Signal Line	Test level	Result	Remarks
LAN	± 1 kV	Complies (A)	No reaction recognized

3.3.4 Surge

Definition:

The test assesses the ability of the EUT to operate as intended in the event of surge presence on the AC main power input ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2018.06.28.
Test method	:	EN 61000-4-5:2014
Temperature / Humidity / Pressure	:	24 °C / 49 % R.H. / 100.1 kPa
Test level	:	± 0.5 kV, ±1 kV (line to line) ± 0.5 kV, ± 1 kV, ± 2 kV (line to ground), ± 0.5 kV, ± 1 kV (signal line)
Polarity	:	Negative/ positive
Wave shape	:	1.2/ 50 µs pulse
Number of surges	:	5 (at each phase)
Test mode		Rec mode
Result	:	Complies

Measurement Data:

Phase	Line	level	Result	Remark
0°	Line(L) to line(N)	± 0.5, 1.0 kV	Complies (A)	No reaction recognized
90°	Line(L) to line(N)	± 0.5, 1.0 kV	Complies (A)	No reaction recognized
180°	Line(L) to line(N)	± 0.5, 1.0 kV	Complies (A)	No reaction recognized
270°	Line(N) to ground(PE)	± 0.5, 1.0 kV	Complies (A)	No reaction recognized

3.3.5 Conducted disturbances, induced by radio-frequency fields

Definition:

The test assesses the ability of the EUT to operate as intended in the presence of a radio frequency electromagnetic disturbance on the input/output ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2018.07.02.
Test method	:	EN 61000-4-6:2014/AC:2015
Temperature / Humidity / Pressure	:	24 °C / 50 % R.H. / 100.1 kPa
Frequency range	:	0.15MHz – 100 MHz
Test level	:	10 Vrms unmodulated
Amplitude Modulation	:	AM, 80 %, 1 kHz Sinusoidal PM, 1 Hz (0.5s ON : 0.5s OFF)
Step size	:	1 % of fundamental.
Test mode	:	Rec mode
Result	:	Complies

Measurement Data:

Port	Test level (Vrms)	Result	Remarks
Power Line	10	Complies (A)	No reaction recognized

Port	Test level (Vrms)	Result	Remarks
LAN	10	Complies (A)	No reaction recognized

3.3.6 Mains supply voltage dips, short interruptions

Definition:

The test assesses the ability of the EUT to operate as intended in the event of voltage dips and interruptions present on the AC mains power input ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date : 2018.06.29.
 Test method : EN 61000-4-11:2004/A1:2017
 Temperature / Humidity / Pressure : 23 °C / 50 % R.H. / 100.1 kPa
 Ut : 230 Vac
 Test mode : Rec mode
 Result : **Complies**

Measurement Data:

Test Level % Ut	Voltage droop and interruptions % Ut	Duration of Reduction (period)	Result	Remarks
80	20	250	Complies (A)	No reaction recognized
70	30	25	Complies (A)	No reaction recognized
40	60	10	Complies (A)	No reaction recognized
0	100	250	Complies (C)	EUT OFF during the test. After the test, EUT was operated normally about user's control.

3.3.7 Mains supply voltage variations

Definition:

The test assesses the ability of the EUT to operate as intended in the event of voltage variations present on the AC mains power input ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test date	:	2018.06.29.
Test method	:	EN 50130-4:2011/A1:2014
Temperature / Humidity / Pressure	:	23 °C / 50 % R.H. / 100.1 kPa
Supply Voltage maximum	:	$U_{nom} + 10 \%$
Supply Voltage minimum	:	$U_{nom} - 15 \%$
U_t	:	230 Vac
Test mode	:	Rec mode
Result	:	Complies

Measurement Data:

U_{nom} = Nominal mains voltage. Where provision is made to adapt the equipment to suit a number of nominal supply voltages (e.g. by transformer tap changing), the above conditioning severity shall be applied for each nominal voltage, with the equipment suitably adapted. For equipment which is claimed to be suitable for a range of nominal mains voltages (e.g. 220/240 V) without adaptation, $U_{max} = (\text{Maximum } U_{nom}) + 10 \%$, and $U_{min} = (\text{Minimum } U_{nom}) - 15 \%$. In any case the range of U_{nom} must include the European nominal mains voltage of 230 V.

2 Mains supply voltage variations

230 V, 50 Hz

Test LevelCondition		Test Level (V)	Result	Remarks
U_{nom}	+10%	253	Complies (A)	No reaction recognized
U_{nom}	-15%	195.5	Complies (A)	No reaction recognized

APPENDIX A

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment are identified by the Test Laboratory.

Conducted emissions

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESR	Rohde & Schwarz	101499	2018.07.11	1 year
<input checked="" type="checkbox"/>	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100710	2019.03.19	1 year
<input type="checkbox"/>	LISN	ESH3-Z6	Rohde & Schwarz	100378	2018.09.07	1 year
<input type="checkbox"/>	LISN	ESH3-Z6	Rohde & Schwarz	101468	2018.12.21	1 year
<input checked="" type="checkbox"/>	LISN	ENV216	Rohde & Schwarz	100408	2018.09.07	1 year
<input checked="" type="checkbox"/>	LISN	LT32C/10	AFJ	32031518210	2018.11.24	1 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3_Ver: 5.5.201a	AUDIX	-	-	-
<input checked="" type="checkbox"/>	ISN	ISN T800	TESEQ	27109	2019.01.23	1 year
<input type="checkbox"/>	ISN	ENY81-CA6	Rohde & Schwarz	101565	2019.01.23	1 year
<input type="checkbox"/>	CURRENT PROBE	EZ-17	Rohde & Schwarz	100508	2019.01.22	1 year

Radiated Emission – Below 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2018.12.21	1 year
<input checked="" type="checkbox"/>	Amplifier (25 dB)	8447D	HP	2944A07684	2018.09.07	1 year
<input checked="" type="checkbox"/>	TRILOG Antenna	VULB9160	SCHWARZBECK	9160-3237	2019.05.16	2 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3_Ver: 6.2009-10-12a	AUDIX	-	-	-

Radiated Emission – Above 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2018.12.21	1 year
<input checked="" type="checkbox"/>	Amplifier (25 dB)	8449B	HP	3008A00337	2019.03.19	1 year
<input checked="" type="checkbox"/>	HORN ANTENNA	3115	ETS	00055005	2019.05.16	2 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3_Ver: 6.2009-10-12a	AUDIX	-	-	-

Harmonic Current / Voltage Variation and Flicking

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	Precision Power Analyzer	PPA551	Newtons4th Ltd	162-04957	2018.09.18	1 year
<input checked="" type="checkbox"/>	Reference Impedance Network	ES4152	NF Corp.	9074424	2018.09.07	1 year

Electrostatic Discharge

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	ESD Simulator	ESS-2000	NOISEKEN	ESS0625187	2019.03.20	1 year

RF Electromagnetic Field

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	Signal Generator	E4432B	Agilent	MY41310632	2019.05.15	1 year
<input checked="" type="checkbox"/>	Power Meter	E4419B	Agilent	GB38410133	2019.05.15	1 year
<input checked="" type="checkbox"/>	RF POWER AMPLIFIER	ITA0300KL-300	INFINITECH	0300KL 1507 001	-	-
<input checked="" type="checkbox"/>	RF POWER AMPLIFIER	ITA2000KL-120	INFINITECH	200KL 1507 001	-	-
<input checked="" type="checkbox"/>	RF POWER AMPLIFIER	ITA4500KL-70	INFINITECH	4500KL 1507 001	-	-
<input checked="" type="checkbox"/>	RF POWER AMPLIFIER	ITA0750KL-300	INFINITECH	0750KL 1507 001	-	-
<input checked="" type="checkbox"/>	Log.-Per.Antenna (80 MHz ~ 3 GHz)	K9128	RAPA	NONE	-	-

Electrical fast transients

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	Compact Generator	NX5	EMTEST	P1640185038	2019.03.19	1 year
<input checked="" type="checkbox"/>	AC Power Source	Variac NX1-260-16	EMTEST	P1648188071	2019.03.19	1 year
<input checked="" type="checkbox"/>	Capacitive Coupling Clamp	CCI	EMTEST	P1703190739	2019.03.19	1 year

Surge

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	Compact Generator	NX5	EMTEST	P1640185038	2019.03.19	1 year
<input checked="" type="checkbox"/>	AC Power Source	Variac NX1-260-16	EMTEST	P1648188071	2019.03.19	1 year
<input type="checkbox"/>	CDN	CNV508N1	EMTEST	P1623180335	2019.03.19	1 year

Conducted disturbances, induced by radio-frequency fields

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	Signal generator	SML03	R&S	103026/0013	2019.03.19	1 year
<input checked="" type="checkbox"/>	POWER METER	NRVD	R&S	101689	2019.03.19	1 year
<input checked="" type="checkbox"/>	RF Power Amplifier	FLL75A	FRANKONIA	1033	-	-
<input checked="" type="checkbox"/>	EM INJECTION CLAMP	TSIC-23	F.C.C	529	2019.05.16	1 year
<input type="checkbox"/>	CDN (M1)	TSCDN-M1-16A	F.C.C	07004	2018.09.07	1 year
<input checked="" type="checkbox"/>	CDN (M2)	TSCDN-M2-16A	F.C.C	07008	2018.09.07	1 year
<input checked="" type="checkbox"/>	CDN (M3)	TSCDN-M3-16A	F.C.C	07017	2018.09.07	1 year

Mains supply voltage dips, short interruptions

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	Compact Generator	NX5	EMTEST	P1640185038	2019.03.19	1 year
<input checked="" type="checkbox"/>	AC Power Source	Variac NX1-260-16	EMTEST	P1648188071	2019.03.19	1 year

Mains supply voltage variations

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	Compact Generator	NX5	EMTEST	P1640185038	2019.03.19	1 year
<input checked="" type="checkbox"/>	AC Power Source	Variac NX1-260-16	EMTEST	P1648188071	2019.03.19	1 year

APPENDIX B

PERFORMANCE CRITERIA

Performance criteria

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of the bursts is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test

(see Clause 6), after the conditioning.

Slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of the surges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test

(see Clause 6), after the conditioning.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at $U_0 = 130 \text{ dB}\mu\text{V}$.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at $U_0 = 140 \text{ dB}\mu\text{V}$, providing

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable settings, etc.)

(b) at $U_0 = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used, and

(c) there is no observable deterioration of the picture at $U_0 = 120 \text{ dB}\mu\text{V}$.

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

Mains supply voltage variations

There shall be no damage, malfunction or change of status due to the different supply voltage conditions. The EUT shall meet the acceptance criteria for the functional test(see Clause 6), during the conditioning.

APPENDIX C

PHOTOGRAPHS


Conducted emission (Maximum emission configuration)




Conducted emission (Maximum emission configuration) _ TEL



Radiated emission (Maximum emission configuration)-Below 1 GHz

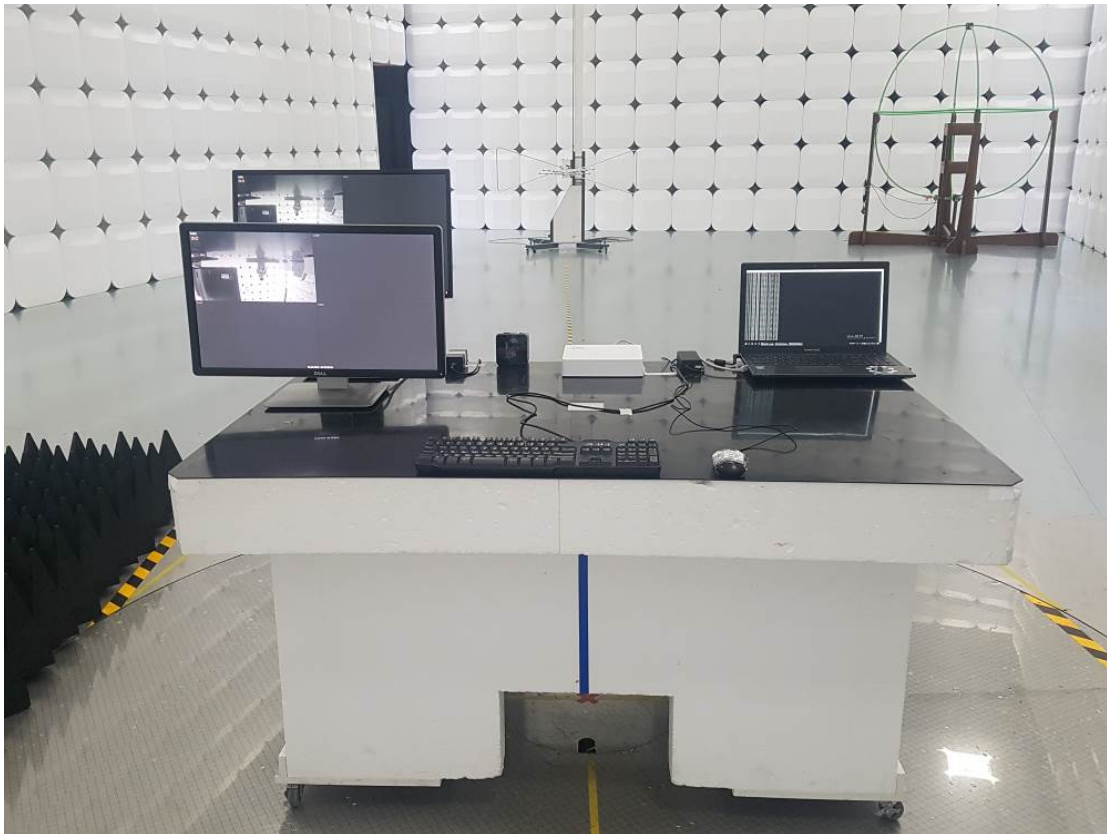

Radiated emission (Maximum emission configuration) – Above 1GHz

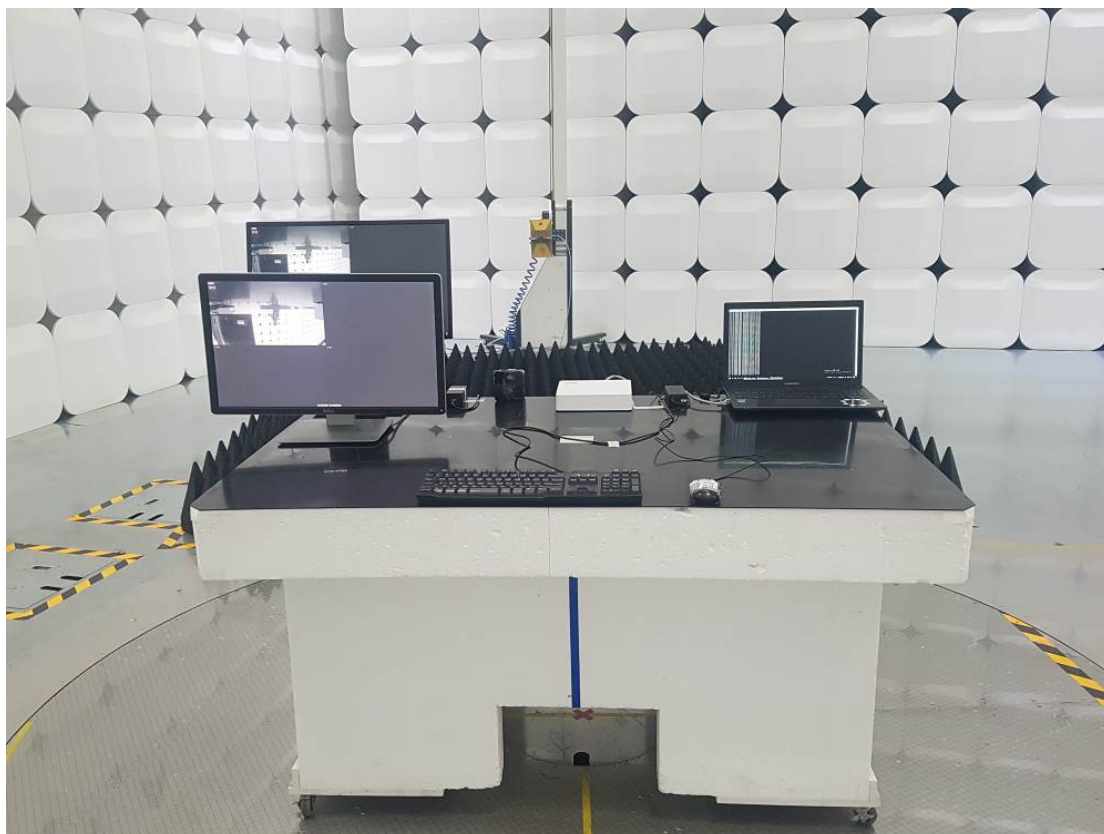


Harmonic Current / Voltage Variation and Flicking



Electrostatic discharge



RF Electromagnetic Field

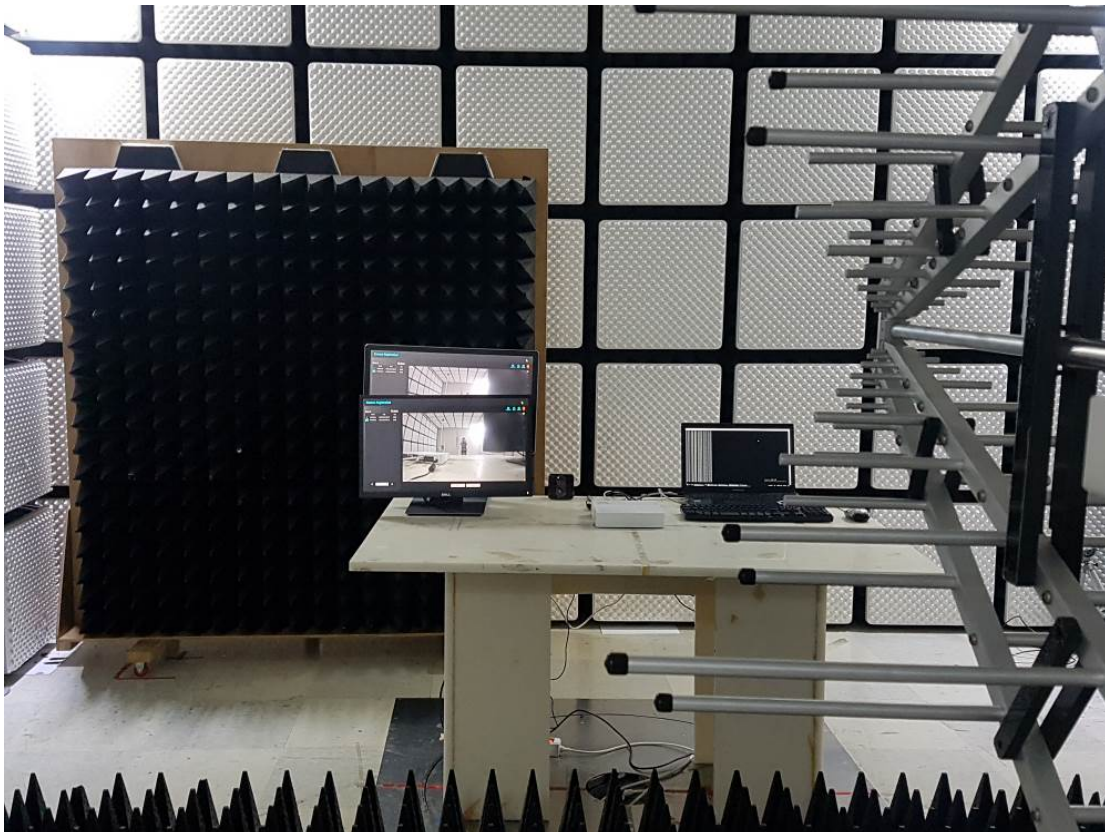

Electrical fast transients



Surge



Conducted Disturbances, Induced by Radio-Frequency Fields



Main supply voltage dips, short interruptions



EUT



EUT

